

SteelcraftTM

STRIDER COMPACT

Deluxe edition

SECOND SEAT



IMPORTANT: KEEP THIS BOOKLET IN A SAFE PLACE FOR FUTURE REFERENCE

WARNINGS

WARNINGS:

- **SECURE THE CHILD IN THE HARNESS AT ALL TIMES.**
- **DO NOT USE ANY ACCESSORIES OTHER THAN THOSE APPROVED FOR USE WITH THIS STROLLER BY BRITAX.**
- **IT IS UNSAFE TO USE ACCESSORIES NOT APPROVED FOR USE WITH THIS STROLLER.**
- **THE MAXIMUM WEIGHT OF THE CHILD USING THIS SECOND SEAT IS NOT TO EXCEED 17KG.**

IMPORTANT NOTES:

- **DO NOT USE THIS SECOND SEAT WITH ANY OTHER MODELS OF STROLLER.**
- **THE SECOND SEAT MUST BE CORRECTLY FITTED AND LOCKED ONTO THE STROLLER FRAME.**
- **THE SECOND SEAT CAN ONLY BE USED IN THE FORWARD FACING POSITION, CONNECTED TO THE REAR OF THE STROLLER.**
- **DO NOT OVERLOAD THE STROLLER. OVERLOADING WILL CAUSE THE STROLLER TO TIP BACKWARDS.**



This CAUTION Symbol is shown at certain steps in this Instruction Manual to highlight the danger of being injured by moving parts.

MANUAL HANDLING TECHNIQUES

The **SMART** lifting technique

This technique can be used to pick up small light loads from low levels.

Size up the Load

- Assess the load (size, shape and weight).
- Assess whether the load needs to be moved;
- Where is it going to be placed, check that there are no obstructions;
- Assess whether mechanical or human assistance is required.

Move the Load as close to the body as possible

- A load is heavier to lift or carry if it is not close to the body.
- The whole hand should be used to ensure a firm grip.

Always bend your knees

- Maintain balance.
- Keep feet apart and in a comfortable position.
- Minimise lower back bending.
- Bend knees preferable at as large an angle as possible but not at a right angle use a semi squat in preference to a full squat.

Raise the load with your legs


- Achieve the lift smoothly and without jerkiness.
- Maintain the normal curvature of the spine to allow the force of the load to be distributed evenly from the spine to the pelvis.

Turn your feet in the direction that you want to move the load.


- Avoid unnecessary bending, twisting and reaching.
- Change direction by turning your feet and not your back.
- To set the load down, squat down, keep your head up and
- Let your legs do the work.

Remember to 'THINK TALL' chest lifted, shoulders relaxed, chin tucked in and head level.


PARTS LIST

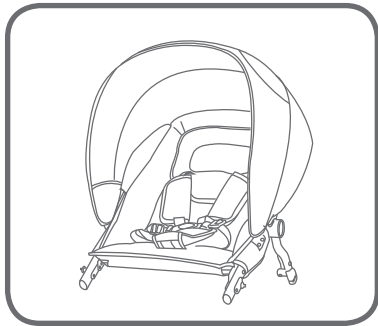

1x second seat

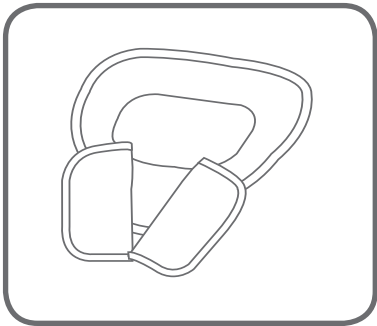


1x Head pillow +
2x Shoulder Harness Pads

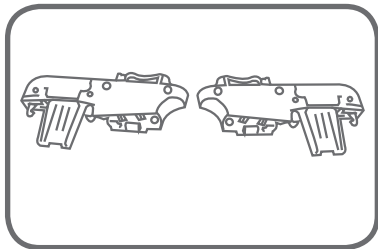

1x Set of extension Adaptors

SECOND SEAT FEATURES

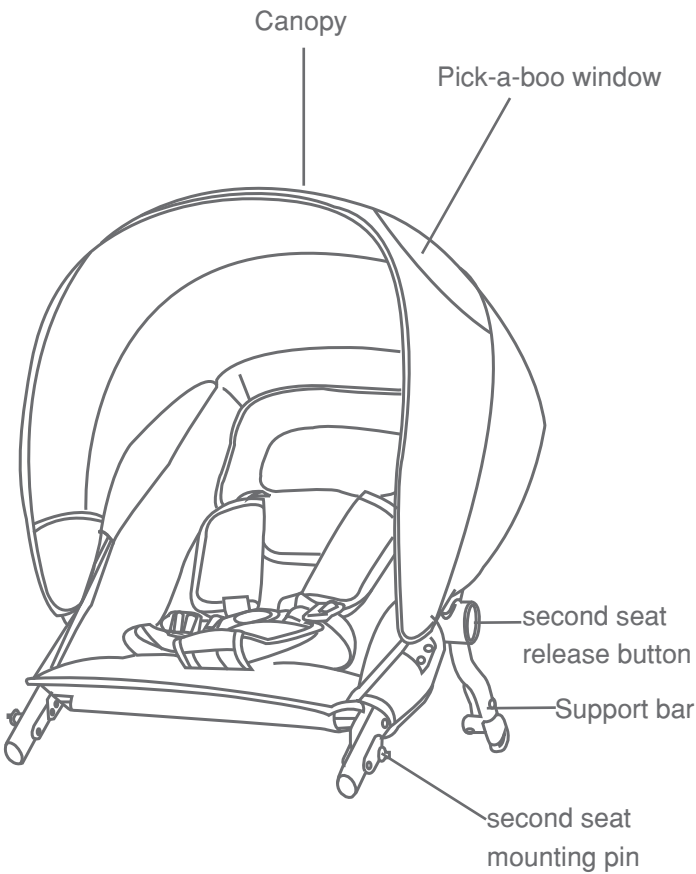


SECOND SEAT ASSEMBLY


ATTACHING THE CANOPY

IMPORTANT NOTE:


The sun is very strong. **DO NOT LEAVE YOUR CHILD EXPOSED TO THE SUN.** The canopy or hood on this product will not give your child total protection from the harmful rays of the sun.

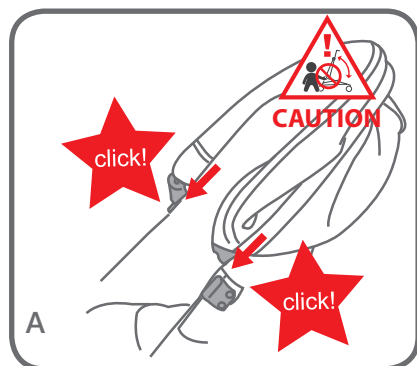


A Fit the canopy over the back of seat and slide the canopy mouldings onto the canopy frame mouldings until they interlock together.

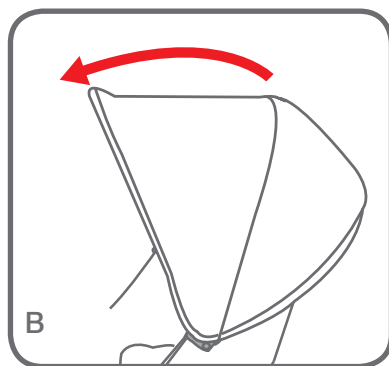

B To adjust the canopy, open by pulling forward, or close by pushing the canopy backward.

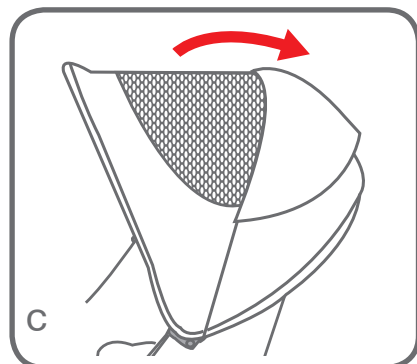

C To expose mesh window, open the window flap to the back.

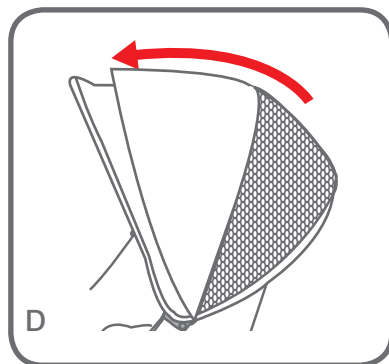


D To expose mesh panel lift the mesh cover.

SECOND SEAT ASSEMBLY


ATTACHING THE HEAD PILLOW AND SHOULDER PADS

IMPORTANT NOTE:

ENSURE THAT THE SHOULDER STRAPS ARE FITTED THROUGH THE APPROPRIATE HARNESS SLOTS TO SUIT YOUR CHILD'S SEATED SHOULDER HEIGHT.

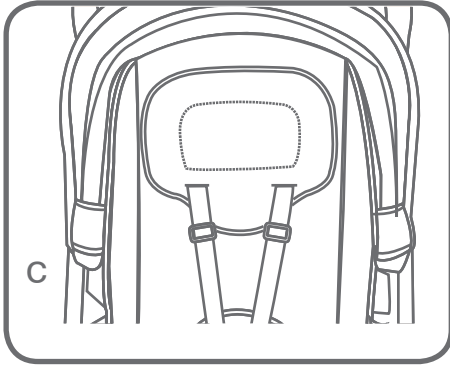

C To use the head pillow, place the head pillow on the stroller seat and connect the hook and loop to desired position.

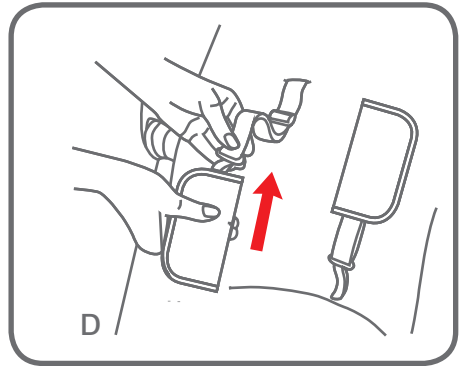

D Slide the shoulder harness pads onto the shoulder harness straps and adjust to the position which fits comfortably on the child.

SECOND SEAT ASSEMBLY


ATTACHING THE SECOND SEAT TO THE STROLLER FRAME

IMPORTANT NOTE:

PLEASE REFER TO PAGE 3 FOR SMART LIFTING TECHNIQUES.

- WHEN FITTING, OPENING, OR FOLDING THE SECOND SEAT, BE AWARE OF THE DANGER OF BEING INJURED BY MOVING PARTS AND LOCKING DEVICES DURING THE PROCESS. KEEP ALL HANDS AND LIMBS CLEAR OF THESE PARTS.
- THERE IS POTENTIAL FOR FINGERS OR PARTS OF THE BODY TO BE INJURED WHEN THE STROLLER IS BEING FOLDED OR UNFOLDED, DUE CARE SHOULD BE EXERCISED.
- KEEP CHILDREN CLEAR OF THE STROLLER DURING FOLDING OF THE STROLLER.

PLEASE NOTE: Extension Receivers can be used to create more space between the stroller seat and second seat. (Refer to page 18)

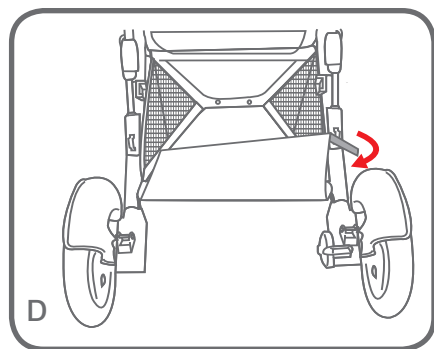


A Engage the stroller brake.

B Rotate the pivotal handle to the highest position.



C Raise the stroller seat backrest to the fully upright position.

D Unhook the straps of the back of the basket and put in the basket.

SECOND SEAT OPERATION

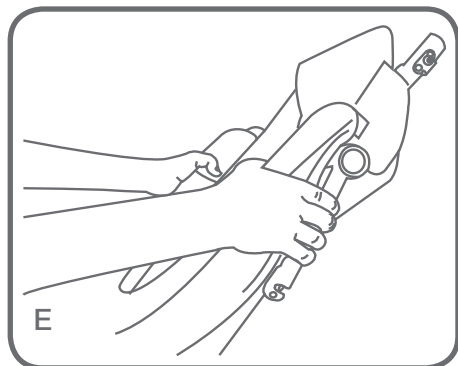


E For attaching the second seat to the stroller frame, Fold the support bars to the back of the second seat and hold with hands.

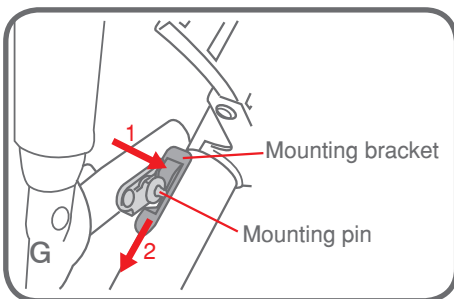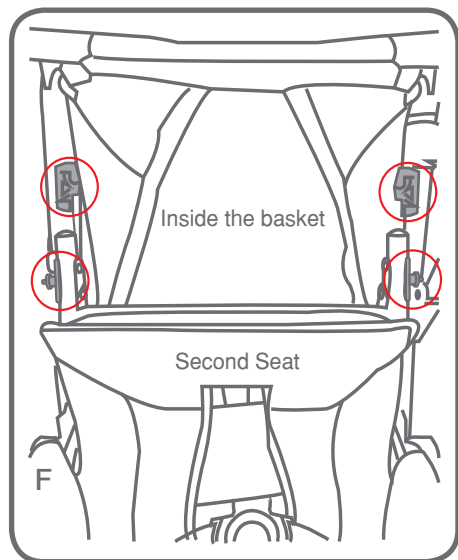


F Line up the second seat mounting pins with the mounting brackets on the stroller frame. Line up the support bars on the second seat with the lower mounting brackets on the inside of the stroller frame (located on rear wheel housing).

G Slide the mounting pins into the mounting brackets (as indicated by arrow 1) on the stroller frame then pull downwards (as indicated by arrow 2).

SECOND SEAT OPERATION

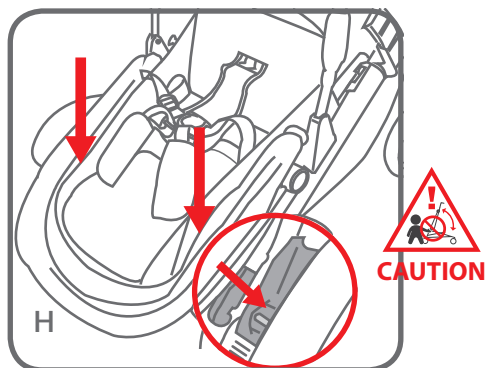

H Lower the second seat and press down until the support bars are locked into the lower mounting brackets on the inside of the stroller frame (located on rear wheel housing).

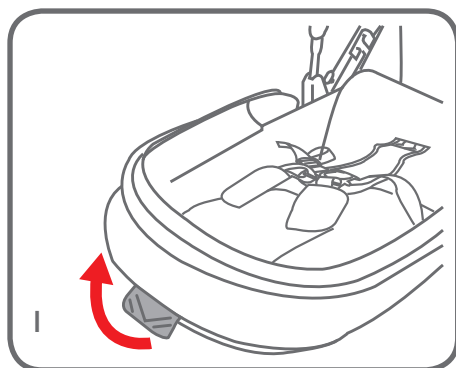

I Lift the recline lever of the second seat so the foot end slides completely down and engages into the stroller frame. Pull the second seat upwards to ensure it is locked onto the stroller frame.


SECOND SEAT OPERATION

ADJUSTING THE BACKREST

WARNINGS:

- THE UPRIGHT POSITIONS ARE NOT SUITABLE FOR USE WITH CHILDREN LESS THAN 6 MONTHS OLD.
- THE LOWEST RECLINE POSITION SHOULD BE USED TO TRANSPORT BABIES. THE BACKREST CAN BE ADJUSTED TO A MORE UPRIGHT POSITION AS THE CHILD GROWS OLDER AND IS ABLE TO SUPPORT ITS HEAD WITHOUT ASSISTANCE.

PLEASE NOTE: If the child is sitting in the seat, support the backrest as it reclines. If you have difficulty adjusting the backrest you may need to remove the child from the seat to allow you to raise or lower the backrest with ease.

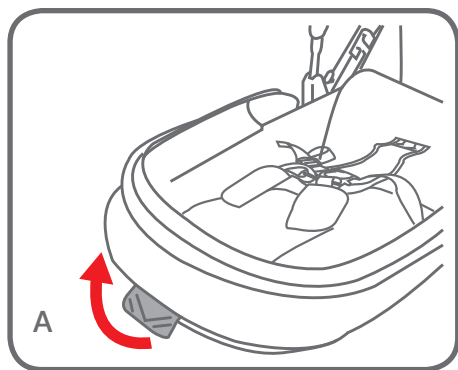


A Lift the recline lever at the top of the second seat and hold while raising or lowering the backrest to the desired position.

SECOND SEAT OPERATION


REMOVING THE SECOND SEAT FROM THE STROLLER FRAME

IMPORTANT NOTES:


ALWAYS REMOVE YOUR CHILD FROM THE SECOND SEAT BEFORE FOLDING OR REMOVING THE SECOND SEAT.

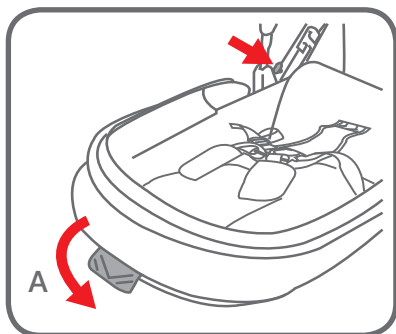

- A** Fold the canopy back, then fully lift the recline lever and lower the second seat to the lowest position. While still holding the recline lever, press the second seat safety release button and continue to lower the seat.

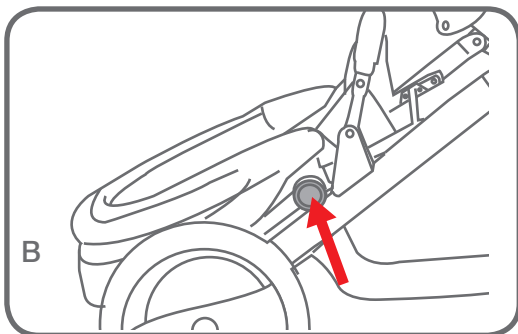

- B** Grasp the sides of the second seat frame and press the second seat release buttons in on both sides of the second seat. While holding the button, lift the seat up and forward to release the seat.

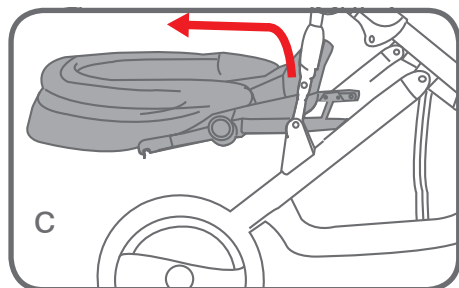

- C** Lift the second seat up and away from the stroller frame.


SECOND SEAT OPERATION

SECURING YOUR CHILD HARNESS


WARNINGS: USE THE HARNESS AT ALL TIMES.

- ENSURE YOUR CHILD IS SECURED WITH A CORRECTLY ADJUSTED HARNESS.
- THE ADJUSTED HARNESS SHOULD CLOSELY FIT THE CHILD.
- NEVER LEAVE THE HARNESS BUCKLED WHEN NOT FITTED TO A CHILD IN THE STROLLER, BECAUSE THE HARNESS CAN FORM LOOPS WHICH MAY POSE A STRANGULATION HAZARD.
- WHEN HARNESS IS NOT IN USE, DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAPS AND BUCKLE TO PREVENT STRANGULATION.
- A five point harness is provided to restrain your child.
- Buckle tongues separate for added safety.
- To reconnect buckle tongues and to secure the child in the harness please follow the steps below carefully.

PLEASE NOTE: Each waist buckle tongue has a raised rib on one side and can only be locked into the buckle assembly with the raised rib facing up. Ensure the harness straps are not twisted as they may become uncomfortable for the child.

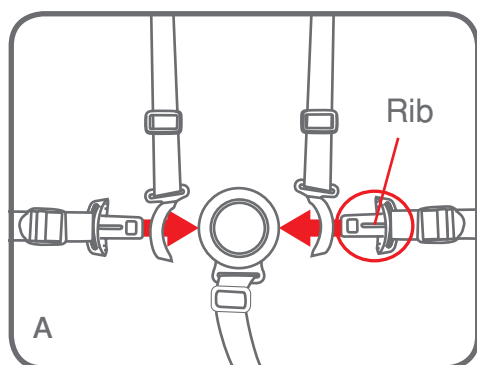


A Always apply the brakes before placing child in stroller seat. Position the shoulder strap near the child's shoulder and position crotch strap between legs. Thread the waist strap buckle tongues through the shoulder strap tongue guides.

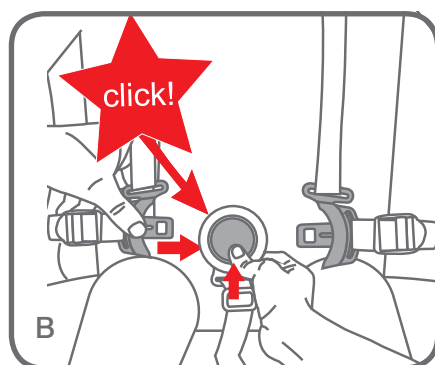


B Hold the centre button in on the crotch buckle and insert the waist buckle tongues into the crotch strap buckle until you hear a 'click'. Repeat the procedure on the other side. Please ensure it's locked.

STROLLER OPERATION

ADJUSTING THE HARNESS

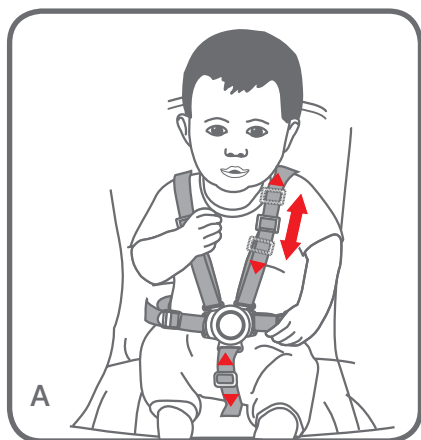


A Tighten or loosen the shoulder straps and crotch strap by sliding the 3 bar harness adjuster up or down. The crotch strap should be adjusted to a snug fit.

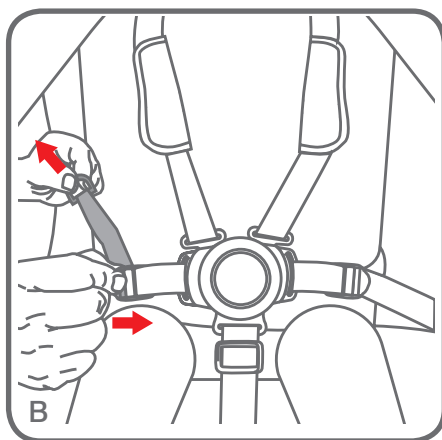

B Tighten or loosen the waist straps, hold and lift the 4 bar harness adjuster and pull the harness strap to adjust to the desired fit. The waist strap needs to fit firmly around the child.

CAUTION: DO NOT SLIDE 3 BAR SLIDER OVER THE SEWN TAB ON SHOULDER HARNESS.

OPENING THE HARNESS

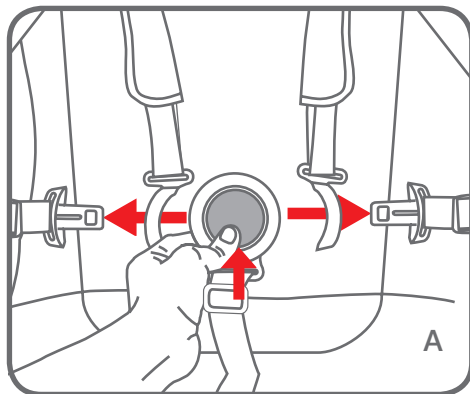


A Release the harness by pressing the centre button in on the crotch buckle while pulling the waist tongues out of the crotch buckle.

STROLLER OPERATION


ADJUSTING THE SHOULDER HARNESS HEIGHT

IMPORTANT NOTE:

THE HARNESS CAN BE ADJUSTED TO THREE DIFFERENT HEIGHTS TO ACCOMMODATE THE CHILD. THE SHOULDER STRAPS MUST BE POSITIONED NEAR THE CHILD'S SHOULDERS.

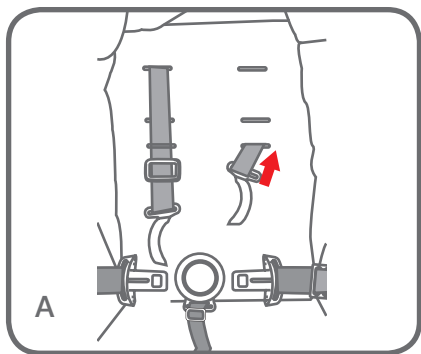

A To change the shoulder harness height, push the shoulder harness tongue out of the current harness slot and through the back of the seat.

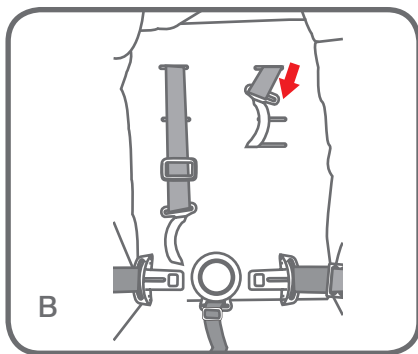

B Select the appropriate shoulder harness height and pull each Shoulder harness tongue through the harness slot.

SECOND SEAT OPERATION

FOLDING THE STROLLER WITH SECOND SEAT


IMPORTANT NOTE:

PLEASE REFER TO PAGE 3 FOR SMART LIFTING TECHNIQUES.

- REMOVE THE CHILD FROM THE SECOND SEAT BEFORE COMMENCING A FOLDING OPERATION.
- FOLD THE SECOND SEAT SLOWLY AND BE CAREFUL WHERE YOU PLACE YOUR HANDS.
- WHEN FOLDING THE SECOND SEAT BE AWARE OF THE DANGER OF BEING INJURED BY MOVING PARTS AND LOCKING DEVICES DURING THE PROCESS.
- KEEP ALL HANDS AND LIMBS CLEAR OF THESE PARTS.
- THERE IS POTENTIAL FOR FINGERS OR PARTS OF THE BODY TO BE INJURED THEN THE SECOND SEAT IS BEING FOLDED, DUE CARE TO BE EXERCISED.
- KEEP CHILDREN CLEAR OF THE STROLLER DURING FOLDING OF THE STROLLER.
- FOLD THE SECOND SEAT BEFORE FOLDING THE STROLLER.
- INCORRECT FOLDING MAY CAUSE DAMAGE TO THE STROLLER AND FRAME.
- PLEASE FOLLOW THE FOLDING INSTRUCTIONS CAREFULLY.


SECOND SEAT OPERATION

- A Remove the child from the stroller.
- B Engage the brakes.
- C Ensure the front wheels are in swivel mode so the front wheels will automatically position under the stroller during folding.
- D Close the canopy.

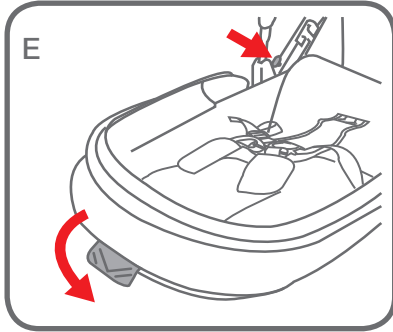

- E Fully lift the recline lever and lower the second seat to the lowest position. While still holding the recline lever, press the second seat safety release button and continue to lower the seat.

PLEASE NOTE: When you folding the stroller with the second seat, make sure the handle height is set to the highest position aligned with frame to prevent the handle coming in contact with the second seat and causing damage to the stroller.

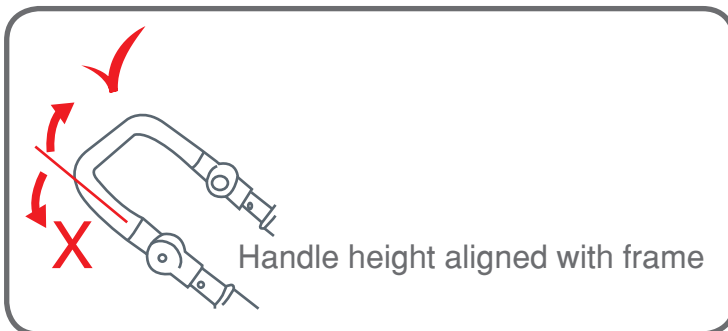


SECOND SEAT OPERATION

ATTACHING THE SECOND SEAT EXTENSION RECEIVERS


IMPORTANT NOTE:

RECEIVERS ARE SUPPLIED TO CREATE MORE SPACE BETWEEN THE TOP SEAT IF REQUIRED, WHEN USING THE SECOND SEAT OR BABY CAPSULE.

Please adjust seat positions and do not use the positions if there isn't enough space for lower occupant.

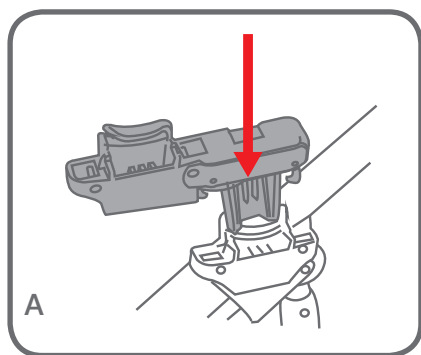


A Attach the receivers to the stroller frame by lining up the connectors with the stroller frame sockets, the receivers should extend towards the front.

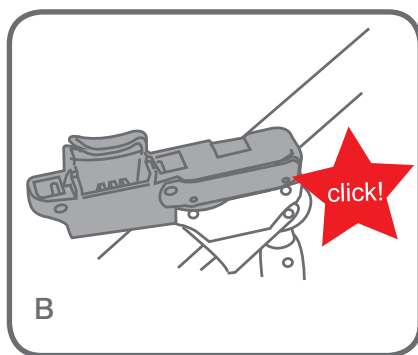

B Press down on the receivers until they lock into the frame sockets.

REMOVING THE SECOND SEAT EXTENSION RECEIVERS

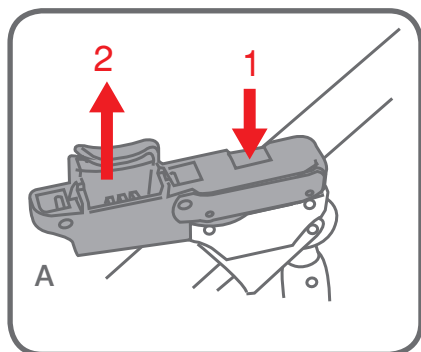


A To remove the receivers, press in and hold the button, then pull the adaptor up and out of the frame sockets.


SECOND SEAT OPERATION

ATTACHING THE STROLLER SEAT TO THE STROLLER FRAME USING THE SECOND SEAT EXTENSION RECEIVERS


! CAUTION: STROLLER SEAT OR BABY CAPSULE MUST BE CORRECTLY ATTACHED.




A The stroller seat attaches and locks same way with receivers as instructed in stroller instruction manual without receivers. The stroller seat can be adjusted with all 4 positions when facing forward.



B When the stroller seat is facing rearward (facing handle), the most reclined position (4 on the side indicator) is the only available position when using the receivers.



C The baby Capsule attaches and locks same way with receivers as instructed in stroller instruction manual without receivers.




D The bassinet is not recommended to use with the second seat with or without extension receivers as there is limited space for second seat occupant.


SECOND SEAT OPERATION

ATTACHING THE BABY CAPSULE TO THE SECOND SEAT FRAME

IMPORTANT NOTE: TO ATTACH THE BABY CAPSULE TO THE SECOND SEAT FRAME, THE FABRIC COVER MUST BE REMOVED FROM THE SECOND SEAT.

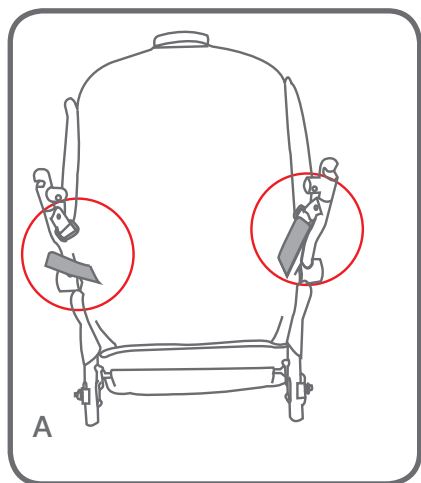


A Remove the second seat from the stroller and remove the canopy. Slide the webbing out of the D-rings.

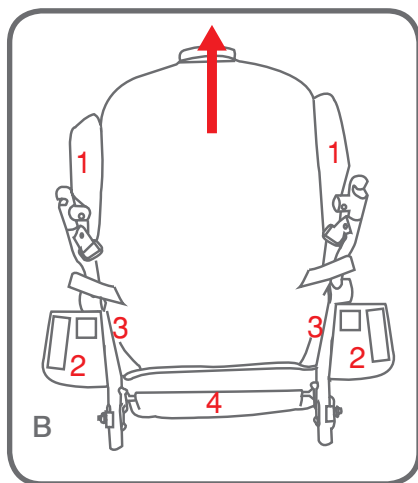


B Unfasten all the hook and loop strips as indicated. And then pull the cover over the frame.


SECOND SEAT OPERATION

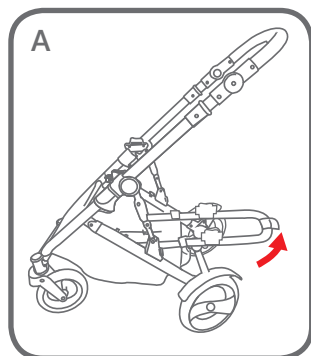

A Lift the frame to the horizontal level when the second lock is engaged.

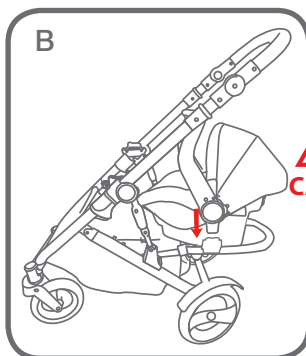


B The Baby Capsule must face towards the front of the stroller. Lower the Baby Capsule into the second seat frame sockets.

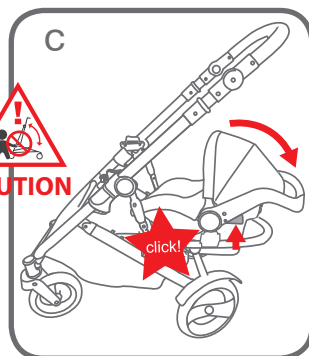


C Squeezing and holding the handle latch, rotate the handle down to lock the Baby Capsule. Please ensure it's locked.

REMOVING THE BABY CAPSULE TO THE SECOND SEAT FRAME

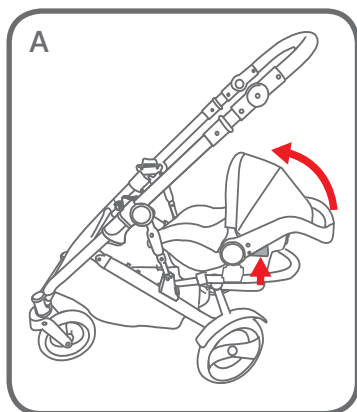

A Squeezing and holding the handle latch and rotate the handle up to unlock the Baby Capsule.

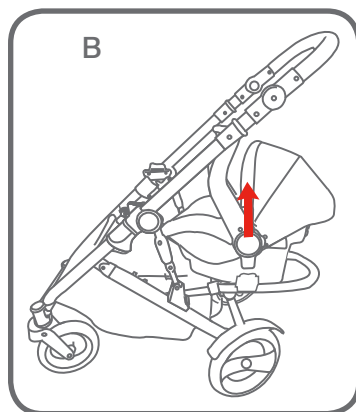


B Lift the Baby Capsule from the second seat frame.


SECOND SEAT OPERATION

ATTACHING THE FABRIC COVER TO THE SECOND SEAT FRAME

IMPORTANT NOTE: TO ATTACH THE BABY CAPSULE TO THE SECOND SEAT FRAME, THE FABRIC COVER MUST BE REMOVED FROM THE SECOND SEAT.

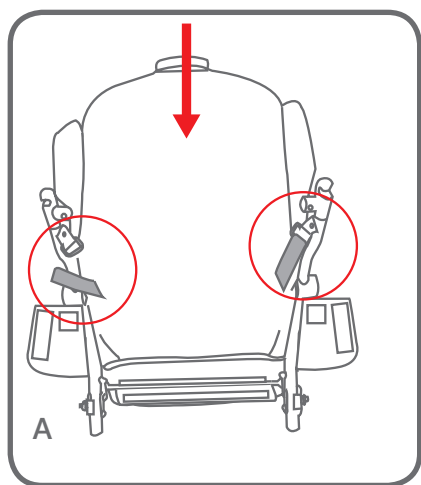

A Pull the cover over the frame. Pull the webbing through the button holes and connect with D-rings.

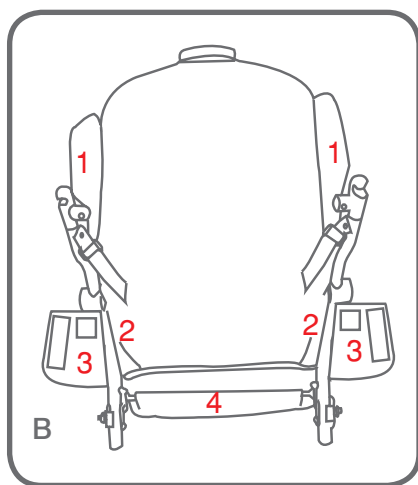

B Fasten all the hook and loop strips as indicated. Attach the canopy. (Refer to page 6)

CARE & MAINTENANCE

- To prolong the life of your stroller keep it clean and do not leave it in the direct sunlight for extended periods of time.
- Removable fabric covers and trims may be cleaned using warm water with household soap or mild detergent. Allow it to dry fully, preferably away from the direct sunlight.
- Non removable fabric covers and trims may be spot cleaned using a damp sponge with soap or a mild detergent. Allow it to dry completely before folding or storing it away.
- In some climates the covers and trims may be affected by mould and mildew, to help prevent this occurring, do not fold or store the product if it is damp or wet. Always store the product in a well ventilated area.
- When using your stroller at the beach - completely clean your stroller afterwards to remove the sand and salt from the mechanisms and wheel assembly. Sand and salt will cause premature wear and corrosion.
- If there are compression marks on the tyres - Use a domestic hair dryer to gently warm (DO NOT OVERHEAT) the tyre and the compression marks should slowly disappear.
- Always check parts regularly for tightness of screws, nuts and other fasteners - tighten if required. To maintain the safety of your nursery product, seek prompt repairs for bent, torn, worn or broken parts. Use only those parts and accessories approved by Steelcraft.

THIS PRODUCT IS NOT INTENDED FOR COMMERCIAL USE.

SteelcraftTM

BRITAX CHILDCARE PTY. LTD.

A.B.N. 55 006 773 600

Level 4, 650 Lorimer Street, Port Melbourne, Victoria 3207, Australia

Phone: (03) 9288 7288 Fax: (03) 9311 5798

CUSTOMER SERVICE

1300 303 330 - Australia 0508 688 822 - New Zealand

Due to our continuing program of development, Britax reserves the right to alter the specifications, color or design without any further notice.

The Steelcraft trademark is the property of Britax Childcare Pty.Ltd - Australia.

The Britax trademark is the property of Britax Childcare Holdings Limited - UK.

Visit the Britax website at: www.britax.com.au or email us at au-custserv@britax.com

Due to the variations in the style and design of our products the illustrations used in this instruction booklet are generic.

This product is designed to comply with Australian and New Zealand standard AS/NZS 2088:2013 "Prams and Strollers - Safety Requirements"

©2018 Copyright Britax Childcare Pty. Ltd. Australia