

○

**britax**  
**safe·n·sound**  
**BABY CAPSULE**

ISOFIX COMPATIBLE

Birth to 12 months (approx.)

Instructions for Installation & Use

Series No. BS0040A-i20133



Suitable for low birth weight and premature infants without restrictive medical conditions.


**ISOFIX**  
COMPATIBLE

NOTE: Style may vary from image shown.




**IMPORTANT: KEEP THIS BOOKLET IN THE PLACE  
PROVIDED ON THE CHILD RESTRAINT BASE**



## QUICK SETUP: ISOFLEX™ (BASE)

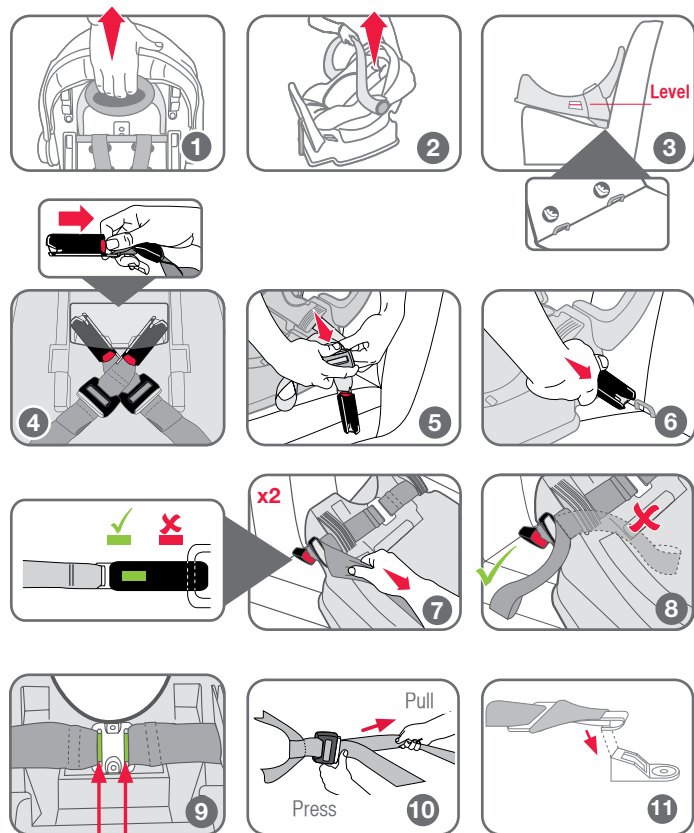


## QUICK SETUP: SEATBELT (BASE)

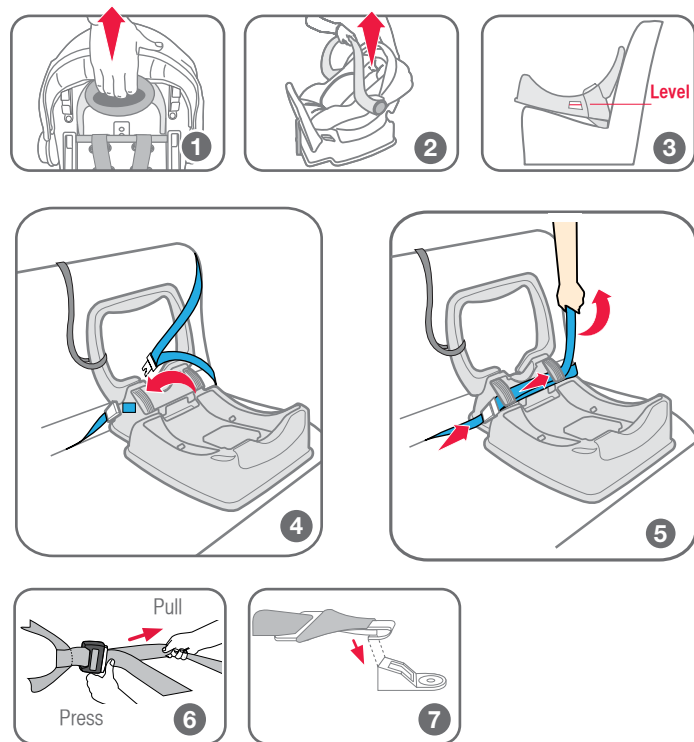


## QUICK SETUP: HARNESS ADJUSTMENT

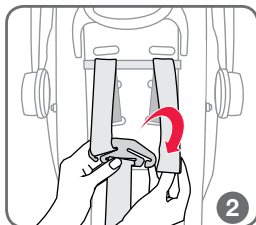


LOW BIRTH  
WEIGHT INFANT






AVERAGE SIZE  
BABY









GROWING  
BABY



LARGER  
BABY

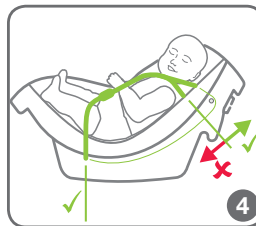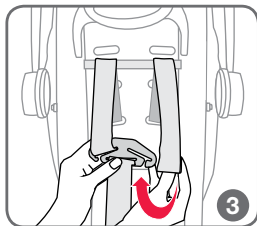

## QUICK SETUP: SECURING BABY

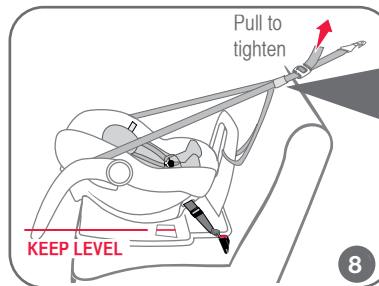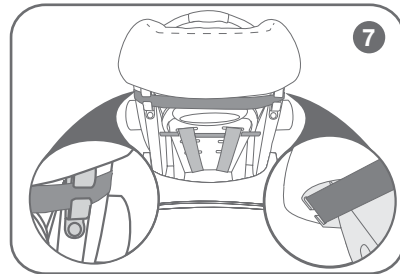

## INTRODUCTION

Suitable for low birth weight and premature infants without restrictive medical conditions. To be used only in a rearward-facing position until the infant's shoulders reach the shoulder height marker (approximately 12 months of age). Continue to use this infant restraint until the child reaches this limit. Infants are at risk of serious injury if they face forward too early.

مناسب لوزن الولادة المنخفض والرضع المبشرين بدون شروط طبية تقييدية. يتم استخدامه فقط في الوضعية المواجهة إلى الخلف حتى يصل كتفي الرضيع إلى علامة ارتفاع الأكتاف (تقريباً في عمر 12 شهر).  
الاستمر في استخدام حاضن الرضيع هذا لحين وصول الطفل إلى هذا الحد  
يكون الرضيع في مخاطرة للتعرض إلى الإصابات الخطيرة إذا تم توجيههم إلى الأمام بصورة مبكرة أكثر من اللازم.

适用于没有严格医疗条件的低出生体重婴儿和早产儿。只采用后向式安装，直到婴儿的肩膀达到肩高标记（大约12个月的宝宝）。  
在儿童达到该座椅上限以前必须不断使用这一婴儿汽车座椅。  
婴儿过早乘坐前向式座椅则可能受到严重的伤害。

Κατάλληλο για βρέφη με χαμηλό βάρος κατά τον τοκετό και πρόωρα βρέφη χωρίς περιοριστικές ιατρικές παθήσεις. Να χρησιμοποιείται μόνο σε θέση στραμμένο προς τα πίσω μέχρι οι ώμοι του βρέφους να φτάνουν στο δείκτη ύψους ώμου (περίπου 12 μηνών).  
Συνεχίστε να χρησιμοποιείτε αυτό το σύστημα συγκράτησης νηπίων μέχρι το παιδί να φτάσει σε αυτό το όριο.  
Τα βρέφη κινδυνεύουν με σοβαρό τραυματισμό αν κοιτάζουν προς τα εμπρός πολύ νωρίς.

Angkop para sa mabababa ang timbang nang ipinanganak at mga napaagang ipinanganak na mga sanggol na walang naghihigpit na kondisyong medikal. Gamitin lamang sa isang nakaharap sa likod na posisyon hanggang sa maabot ng balikat ng sanggol ang marka ng taas ng balikat (humigit-kumulang 12 na buwang edad).  
Ipagpatuloy ang paggamit ng pampigil ng sanggol na ito hanggang sa maabot ng bata ang limitasyong ito.  
Ang mga sanggol ay nasa seryosong peligro ng pagkapinsala kung sila ay haharap ng masyadong maaga.

## INTRODUCTION

Phù hợp với bé sơ sinh nhẹ cân và bé sanh thiếu tháng không có tình trạng sức khỏe giới hạn. Chỉ được sử dụng ở vị trí hướng mặt về phía sau cho đến khi vai của bé cao tới vạch ghi độ cao của vai (khoảng 12 tháng tuổi).  
Hãy tiếp tục sử dụng ghế em bé này cho đến khi em cao tới giới hạn này.  
Bé sơ sinh có nguy cơ bị chấn thương nghiêm trọng nếu hướng mặt về phía trước quá sớm.

जन्म के समय कम भार वाले और समय से पहले जन्मे शिशु के लिये अगर कोई स्वास्थ्य सम्बन्धी रोक न हो, तो उनके लिये उचित। केवल पीछे की तरफ मुँह किये हुये स्थिति में तब तक प्रयोग करें जबतक शिशु का कन्धा कन्धे के चनिह तक न पहुँच जाए (लगभग 12 महीने की आयु पर)।  
शिशु के इस सीमा तक पहुँचने तक इस शिशु प्रतबिन्ध का प्रयोग जारी रखें।  
शिशुओं को समय से पहले सामने की ओर बैठाए जाने पर उन्हें गम्भीर चोट का खतरा होता है।

Conveniente para infantes de bajo peso y prematuros sin afecciones médicas que impongan restricciones. Debe utilizarse sólo orientado hacia adelante hasta que los hombros del niño alcancen el marcador de altura (aproximadamente a los 12 meses de edad).  
Utilice este sistema de seguridad infantil hasta que el niño alcance ese límite.  
El niño corre el riesgo de sufrir lesiones graves si se utiliza la silla orientada hacia adelante antes de tiempo.

適用於無特殊醫療狀況、體重較輕的嬰兒以及早產嬰兒。僅可後向安裝使用，直至嬰兒肩膀達到肩高標記（大約12個月大）。  
孩子應一直採用後向式坐姿，直至其達到後向式坐姿的上限。  
孩子若過早乘坐前向式汽車座椅，可能會對其造成嚴重的傷害。

Adatto per neonati prematuri o di basso peso di basso senza condizioni mediche limitanti. Da utilizzare solo in posizione rivolta all'indietro fino a quando le spalle del bambino raggiungono il marcatore di altezza (circa 12 mesi di età).  
Continuare a utilizzare questo sistema di ritenuta per neonati fino a quando il bambino raggiunge questo limite.  
I neonati sono a rischio di lesioni gravi se messi in posizione frontale troppo presto.

# INTRODUCTION

The Baby Capsule and base is installed so that the infant is facing rearwards. This provides best position in a crash for infants.

This Baby Capsule provides the ability to fit low birth weight or premature babies and has been tested with a special dummy to verify its capability.

No child restraint can guarantee absolute protection from injury in every crash. However, to ensure that your child gets all the protection designed into the restraint, PLEASE READ AND FOLLOW THESE INSTRUCTIONS EXACTLY and use only Safe-n-Sound recommended parts and accessories.

Carefully read all the instructions for installation in this book. If in doubt about the method of installation, consult Britax childcare or agent or a child restraint fitter or, in New Zealand, to consult the agent for the vehicle.

Regional Road Rules restrict the use of child restraints, like this Baby Capsule, in the front seat of a car. Check your local Regional Road Rules.

Always store the instruction book in the place provided in the base when the Baby Capsule is removed.

This product is ISOFIX compatible, the base is fitted with ISOFLEX™ connection straps on each side, with an ISOFIX compatible connector and tension indicators.

The base may also be fitted using the car's seatbelt.

The Baby Capsule is suitable for fitting to a variety of Britax, Steelcraft and BOB Strollers using the respective adaptor system. For compatible Strollers refer to [www.britax.com.au](http://www.britax.com.au).

Britax CLICK & GO™ Adaptor is required for some strollers.

Britax Childcare Pty. Ltd. continues to provide care for your children when travelling in motor cars with a range of child restraints suitable throughout their childhood.

# INDEX

## PAGE

- |   |  |
|---|--|
| <b>10</b> WARNINGS AND IMPORTANT MESSAGES             | <b>47</b> HOW TO INSTALL- AIRCRAFT                     |
| <b>12</b> SHOULDER HEIGHT MARKERS AND A GROWING CHILD | <b>50</b> CARE & MAINTENANCE                           |
| <b>15</b> SHOULDER HEIGHT MARKERS AND THE NEXT STEP   | <b>55</b> ACCESSORIES                                  |
| <b>16</b> SPECIAL FEATURES                            | <b>58</b> INSTALLATION OF CAR'S UPPER ANCHORAGE POINT  |
| <b>20</b> SUITABLE FOR USE                            | <b>63</b> ALTERNATIVE INSTALLATION IF SEATBELT LOOSENS |
| <b>21</b> USING THE BABY CAPSULE                      | <b>65</b> TRAVEL SYSTEM                                |
| <b>23</b> INSTALLING THE BASE                         | <b>66</b> TRAVEL SYSTEM - INTEGRAL LATCH               |
| <b>25</b> HOW TO INSTALL - BASE (ISOFLEX™)            | <b>69</b> TRAVEL SYSTEM - BRITAX CLICK & GO™ ADAPTOR   |
| <b>28</b> HOW TO REMOVE - BASE (ISOFLEX™)             | <b>74</b> TRAVELLING TIPS                              |
| <b>29</b> HOW TO INSTALL - BASE (SEATBELT)            | <b>75</b> IN CASE OF CRASH                             |
| <b>31</b> HOW TO INSTALL - TOP TETHER STRAP           | <b>80</b> WARRANTY                                     |
| <b>33</b> BABY CAPSULE SETUP                          |  |
| <b>39</b> HOW TO USE                                  |  |

## WARNINGS

- Use the restraint exactly as shown in the instructions.
- Supervision of children is needed because they may be able to undo the buckles and adjusters.
- **DO NOT LEAVE CHILDREN UNATTENDED IN THE CAR.**
- Do not alter or modify this restraint.
- Repairs must only be done by the manufacturers or agent.
- Fit the restraint firmly to the car seat.
- Fit the harness firmly to the child.
- A loose restraint or harness is dangerous.
- **DO NOT USE A REAR-FACING CHILD RESTRAINT WHERE AN AIRBAG IS FITTED IN FRONT OF THE SEATING POSITION.** For other airbags, refer to the car owner's handbook for warnings and instructions.
- To ensure infant's back is evenly supported do not put more than one nappy on the baby and make sure the nappy is not thickly folded at the back.
- Do not allow the restraint to come into contact with polishes, oils, bleach and other chemicals.
- Destroy the restraint if it has been in a severe crash, even if no damage is visible.
- Do not harness an infant wrapped in a blanket or swaddled. Any blanket or wrap must only be placed over the harness and infant.
- Always secure the loose end of the top tether strap. Do not use the child restraint where this strap may fall into the seat back or off the side of the seat.
- **ALWAYS ATTACH HOOK AND REMOVE SLACK.**
- Make sure the Baby Capsule handle is latched properly every time you pick up the Baby Capsule.
- **DO NOT USE THIS RESTRAINT WITHOUT THE COVER.**

## IMPORTANT :


- Do not use the child restraint facing forwards. Do not use excessively upright or reclined.
- This restraint must be used in conjunction with a lap or lap-sash seat belt.
- Seatbelt extenders are not recommended to be used if the seatbelt is not long enough to secure the child restraint. If seatbelts are too short then seek advice from a child restraint fitter and consider their recommendations before using a seatbelt extender. If you use a seatbelt extender then ensure that the seatbelt buckle does not sit above the base moulding or prevent the Capsule locking onto the base.
- **THIS RESTRAINT IS NOT SUITABLE FOR USE WHERE THE TOP TETHER STRAP MAY FALL INTO A SPLIT IN THE SEAT BACK OR OFF THE SIDE OF THE SEAT.**
- **THIS RESTRAINT MUST BE ATTACHED TO A CHILD RESTRAINT UPPER ANCHORAGE POINT IN THE CAR. REFER TO CAR OWNER'S HANDBOOK FOR LOCATION OF UPPER ANCHORAGE POINTS. REFER TO A CHILD RESTRAINT FITTING STATION IF NO UPPER ANCHORAGE POINTS ARE IN THE MOTOR CAR.**
- The restraint should not be purchased or sold as a second hand item. It is recommended not to use child restraints older than 10 years as the protection in an accident may be reduced.
- **TO BE USED WITH A LAP-SASH OR LAP-ONLY SEATBELT OR ISOFIX LOW ANCHORAGES IN THE BACK OF MOST CARS WITH FORWARD FACING SEATS.**
- **Do not attach the lower attachment connectors of two separate child restraints to the same ISOFIX low anchorages in your car.**
- **Always attach the top tether strap to the child restraint and upper anchorage in your car before each journey.**
- Child restraint lower attachment connectors and the ISOFIX low anchorages in your car are designed to withstand only those loads imposed by a correctly fitted child restraint.

## SHOULDER HEIGHT MARKERS AND A GROWING CHILD

### NEW BABY

Shoulders below the Shoulder Height Marker.

Maximum Shoulder Height Marker.

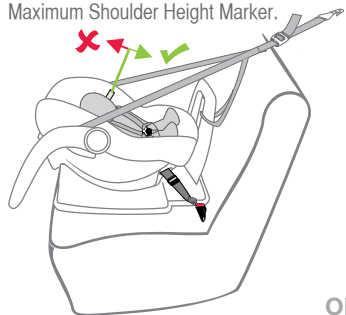


FRONT OF VEHICLE

### OLDER BABY

Shoulders in-line with the Shoulder Height Marker- then you will need to move to the next child restraint.

Maximum Shoulder Height Marker


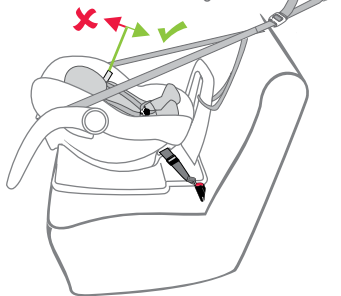


## SHOULDER HEIGHT MARKERS AND A GROWING CHILD

The Baby Capsule is not suitable for your child when their shoulders are above the shoulder height marker.

If the babies neck muscles are unable to support their head then the child should remain rear facing, choose a child restraint that will take larger babies in rear facing.


**DO NOT MOVE TO THE NEXT RESTRAINT UNTIL SHOULDERS REACHES THE SHOULDER HEIGHT MARKER.**

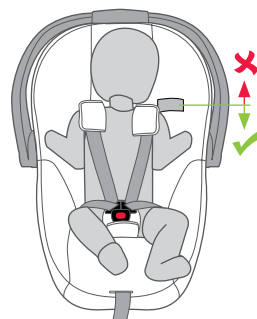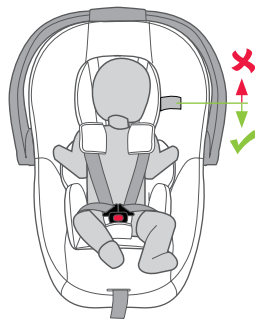

## SHOULDER HEIGHT MARKERS AND A GROWING CHILD

Shoulder height markers are provided on this restraint for a visual indication that the child is safe to ride in this restraint.

**! IMPORTANT: Follow this advice.**

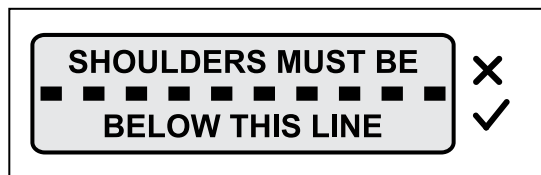

**DO NOT MOVE TO THE NEXT RESTRAINT UNTIL THE BABY'S SHOULDER'S REACH THE SHOULDER HEIGHT MARKER.**

When the baby's shoulders reach this marker, the child is now too big for the Baby Capsule. It is now time to move to the next child restraint, see next page.

## SHOULDER HEIGHT MARKERS AND THE NEXT STEP

**Next type of restraint that can be used in the car for your child.**

When your child has outgrown the seat, you can then either use:

- Convertible Child Seat: Suitable for approximately 12 months, continue to keep your child rear facing until the shoulders reach the lower shoulder height marker. Then turn to forward facing until the child reaches the upper shoulder height marker - approximately 4 years of age. Some convertible child seats may allow for the child to remain rearward facing until 2 to 3 years of age.


Convertible Child Seat



OR

- Dedicated Forward Facing Seat with in-built harness: Suitable for children who have outgrown their Baby Capsule (approximately 6 months old), up to approximately 4 years of age, or 8 years of age depending on the restraint.


Forward-Facing Seat with in-built harness

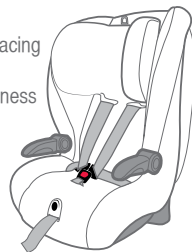

OR


- Convertible Booster Seat with in-built harness that faces forward: Suitable for children who have outgrown their rear facing seat (approximately 6 months old). This seat can be used up to approximately 4 years of age with built-in harness and then be converted to a booster seat and used up to approximately 8 years of age.

Convertible Booster Seat

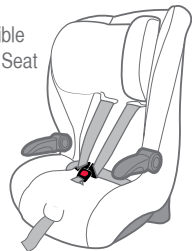

## SPECIAL FEATURES


### BABY CAPSULE

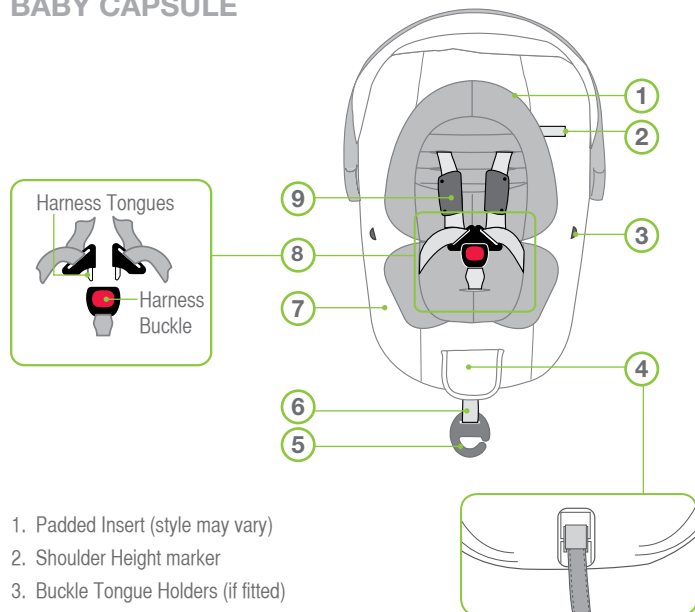

1. Padded Insert (style may vary)
2. Shoulder Height marker
3. Buckle Tongue Holders (if fitted)
4. Harness Adjuster (under flap)
5. Harness adjustment strap hook (disconnected)
6. Harness adjustment strap
7. Cover
8. Harness Tongues and Buckle (Red button)
9. Shoulder Pads (if fitted)

## SPECIAL FEATURES

### BASE

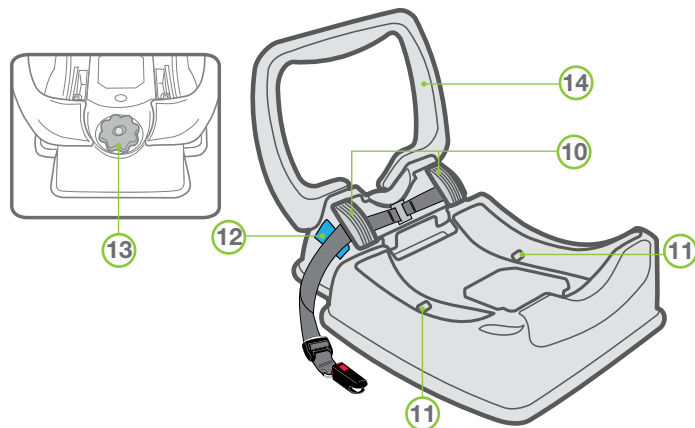


10. Belt Guide Hooks
11. Capsule Latching Points
12. Rearward-Facing Belt Path Label (shown in blue)
13. Levelling Knob
14. Stabilising Bar

Top Tether not shown for illustration purposes.

## SPECIAL FEATURES

### ISOFLEX™ INSTALLATION (ISOFIX COMPATIBLE)

ISOFLEX™ Connectors are flexible attachment connectors for use in a vehicle with ISOFIX low anchorages.

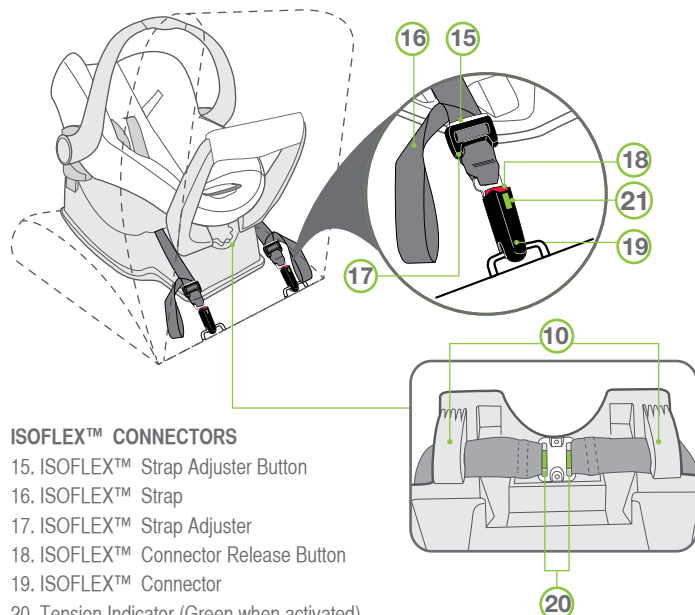


#### ISOFLEX™ CONNECTORS

- 15. ISOFLEX™ Strap Adjuster Button
- 16. ISOFLEX™ Strap
- 17. ISOFLEX™ Strap Adjuster
- 18. ISOFLEX™ Connector Release Button
- 19. ISOFLEX™ Connector
- 20. Tension Indicator (Green when activated)
- 21. Connector Indicator (Green when activated)

Top Tether not shown for illustration purposes.

## SPECIAL FEATURES


### SEATBELT INSTALLATION

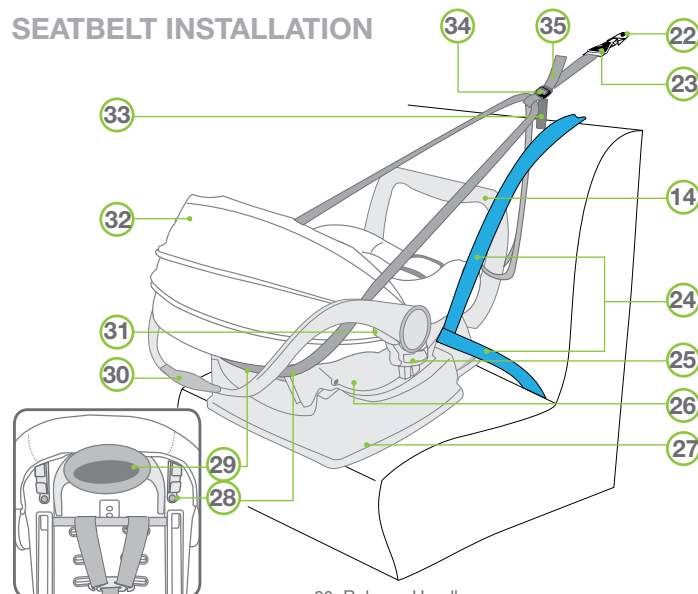

- 22. Car's Upper Anchorage fitting
- 23. Attachment Clip
- 24. Car Seat belt
- 25. Britax CLICK & GO™ Adaptor
- 26. Baby Capsule
- 27. Base
- 28. Top Tether Strap guides
- 29. Release Handle (Located at the back of the Baby Capsule)
- 30. Carry Handle
- 31. Carry Handle release latch
- 32. Canopy
- 33. Storage Pocket
- 34. Top Tether Adjuster
- 35. Top Tether strap

## SUITABLE FOR USE

If the baby's neck muscles are unable to support their head, then the child should remain rear-facing, choose a restraint that will suit larger babies in a rear-facing mode.

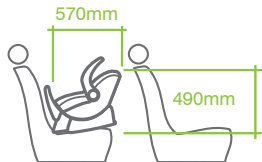

To ensure that the space is sufficient, the purchaser should check the measurements between the vehicle's rear and front seats in which the child restraint is intended to be used. Ensure babies and toddlers are adequately shaded from direct sunlight through side or rear windows.

Check the car is ventilated by opening windows or using the car's ventilation system taking in external air. Recirculation setting is not suitable for providing ventilation.

### **WARNING**


**THE TETHER STRAP MUST ALWAYS BE FITTED WHEN THE CHILD RESTRAINT IS USED IN A VEHICLE.**

Do not use the restraint without the top tether strap correctly attached.

The top tether strap must be attached to an anchorage point using an extension strap if necessary.

The Baby Capsule may just touch the front seat, but must not in such a way that the installation angle is affected.

Do not allow the front seat to alter the installed position of the restraint. It is permissible to allow the restraint to touch the seat in front of it.

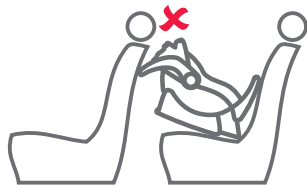


Do not recline the seat excessively, it must be installed at the correct angle (see page 21 - 22).

Do not use on any vehicle seat which faces sideways or rearwards.


## USING THE BABY CAPSULE

### REMOVING BABY CAPSULE FROM BASE

A. Grasp the handle with one hand. With the other hand, lift the catch located at the front of the Baby Capsule.



B. With the catch still lifted raise the Baby Capsule clear of the base.

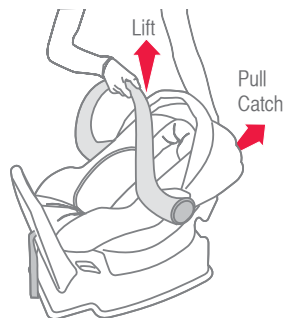

## USING THE BABY CAPSULE

### ADJUSTMENT OF HANDLE POSITION

The Baby Capsule features a sturdy carry handle which can be used in conjunction with the curved base to convert it to a rocker. At the base of the handle there are two large buttons which control the three positions of the handle. These positions are the "carry (or travel) position" ①, the "rocking position" ②, and the "non-rocking position" ③.

A. To convert from carry to "rocking position" ②, depress the large buttons on each side and rotate the handle towards the front of the Baby Capsule. When you have started rotating the handle release the buttons and continue rotating the handle around until it locks into position.


B. Ensure the handle is locked in position securely. The "rocking position" ② enables the Baby Capsule to rock without the possibility of the Baby Capsule tipping over.

C. To convert to a "non-rocking" ③ position depress both buttons and rotate the handle to the fixed position. Ensure the handle is locked in position securely.

#### ① Carry Position



#### ② Rocking Position



#### ③ Non-rocking Position



#### IMPORTANT :

Do not place the Baby Capsule on a table or a work-top where it could fall off.

## INSTALLING THE BASE

### INSTALL INTO VEHICLE

Remove all packaging from the Baby Capsule.

Consult the car owner's handbook for location of top tether anchorage points.

If there is no child restraint anchor fitting or child restraint anchor point refer to pages 58 to 62 for the installation of the anchor fitting as well as the use of extension straps.

An anchor fitting is required to attach the top tether strap to fully install the Capsule to the car. The top tether strap must be used with this Baby Capsule when used in the car.


For installing the Base to the car, select a seating position with a child restraint anchor fitting directly behind the seating position.

### ADJUSTING THE BASE ANGLE


A. Place the base and Baby Capsule on vehicle seat in a seating position where a child restraint anchor fitting is installed. The Level Indicator Line needs to be level with the road, (i.e. parallel with the road surface). Check and adjust the Levelling knob of the base if necessary.

B. If your car's seat is contoured then you may need to adjust the angle of the base so your baby is not too upright.

The angle may be altered by turning the base levelling knob located at the rebound bar end which will cause the levelling foot to extend from the under side of the base.




Level Indicator Line on both sides of base.



Levelling Knob

## INSTALLING THE BASE

Always leave a rearward slope angle of approximately 10° to 15°

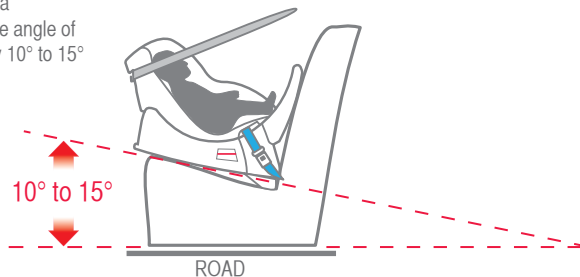


### MANUAL PACKING

The angle may also be altered by placing a firm packing between the seat and the underside of the base (packing can be a firmly rolled up towel or nappy)

For some vehicles with flat seats some packaging may be required at the front edge of the base to get some recline. The stabilising bar does not need to touch the car's seat back but should be close.

Always leave a rearward slope angle of approximately 10° to 15°

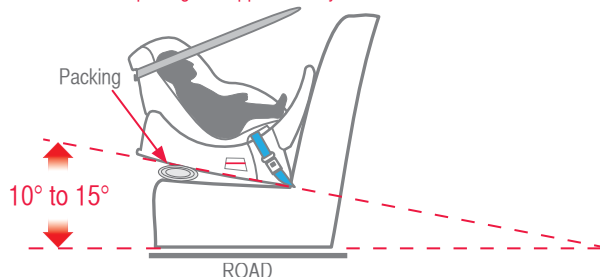

## HOW TO INSTALL THE BASE - WITH ISOFLEX™ CONNECTORS

### WHAT ARE ISOFIX LOW ANCHORAGES IN A VEHICLE?


ISOFIX low anchorages are fixed, standardised anchoring points for securely installing an ISOFIX compatible child restraint in a vehicle with ISOFIX low anchorages. It has now become an international standard for vehicles. This anchoring technology minimises installation mistakes by optimising the protective effect of a solid connection between vehicle and ISOFIX compatible child restraint.

### ISOFLEX™ INSTALLATION INTO THE CAR

To prevent damage to vehicle seat it may be necessary to remove or open a trim covering the ISOFIX low anchorages.



ISOFIX anchors in the vehicle seat

- A. Locate the ISOFIX Low Anchorages in the vehicle seat bight. The location may be identified by one of the following symbols, or the anchorage bars may be visible.




If you cannot locate them, check your vehicle owners manual.

- B. Remove ISOFLEX™ connectors from the stored location underneath the base by pressing the red button to release them.




## HOW TO INSTALL THE BASE - WITH ISOFLEX™ CONNECTORS


- C. Press and hold the adjuster release button and pull the connector strap to fully lengthen it. Repeat for both connector straps.

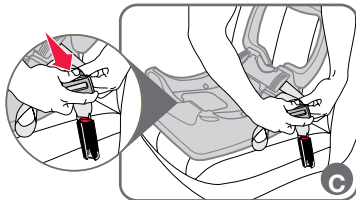

- D. Place the Base in the desired location on the vehicle seat between the two ISOFIX low anchorages. A firm fitment of the base in the vehicle rear seat with the base against the seat back and correct installation angle is very important. The vehicle seat design will determine if the stabiliser bar is in contact or not, it does not need to be.

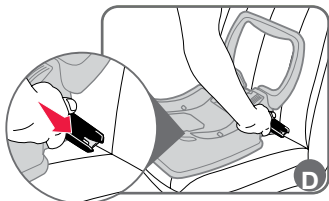

- E. Engage the ISOFLEX™ connectors onto each ISOFIX low anchorage. A green indicator will show on the top of the ISOFLEX™ connector when it has engaged.

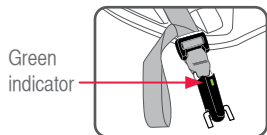


Pull each strap to ensure both lower anchorage connectors are engaged.

- F. Confirm the base angle as desired, otherwise adjust as shown on page 23 and 24.

## HOW TO INSTALL THE BASE - WITH ISOFLEX™ CONNECTORS

- G. Feed the ISOFLEX™ connector straps under the belt guide hooks as shown. Ensure the straps are not twisted.

- H. Push downwards on the side of the restraint base to compress it into the vehicle seat. Whilst compressed into the seat, pull on adjuster strap to remove all slack and tighten the strap. Repeat for the adjuster strap on the other side of the base. The two tension indicators will show green indicating minimum tension has been applied.

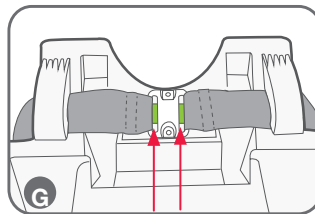

Tension indicators  
Green when tensioned



### IMPORTANT:

**Do not attach the lower attachment connectors of two separate child restraints to the same ISOFIX low anchorages in your car.**

**Always attach the top tether strap to the child restraint upper anchorage in your car.**

**Child restraint lower attachment connectors and the ISOFIX low anchorages in your car are designed to withstand only those loads imposed by a correctly fitted child restraint.**



- I. Locate the child restraint upper anchorage fitting in the vehicle that is directly behind the rear seat location chosen. Refer to the car owner's manual for the location (If there is no upper anchorage fitting then refer to pages 58 to 62 for instructions in adding an anchor fitting).
- J. Connect the top tether strap attachment clip to the anchor fitting in the car as detailed on page 31. Install top tether strap to the Baby Capsule as shown on page 31.

## HOW TO REMOVE THE BASE - WITH ISOFLEX™ CONNECTORS



### REMOVE THE BASE

To store the ISOFLEX™ connectors on the underside of the base

- Press the ISOFLEX™ strap adjuster button to release tension on the straps.
- Press the red release button on each ISOFLEX™ connector, remove from the vehicle ISOFIX low anchorages.
- Fully lengthen the ISOFLEX™ straps and engage each ISOFLEX™ connector onto its storage pin, form a crossover as shown. Remove slack but do not tighten. The storage pin may be damaged if the strap is tightened.
- Remove the excess tether strap from pocket and fully press top tether adjuster button (A) while pulling top tether strap (B) to slacken.
- Disengage the attachment clip from upper anchorage fitting.  
Store loose strap in the storage pocket provided.

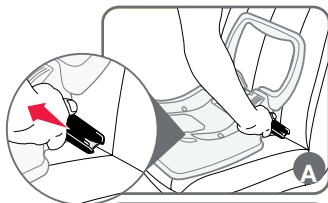

Storage under base

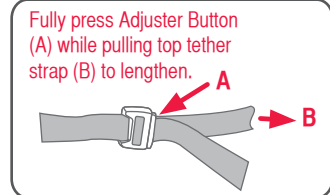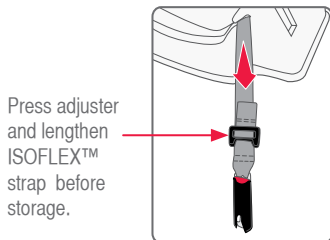


Fully press Adjuster Button (A) while pulling top tether strap (B) to lengthen.

A B

## HOW TO INSTALL THE BASE - WITH SEATBELT


### HOW TO INSTALL BASE USING LAP SASH SEATBELT

- Place the base in the desired location on the vehicle rear seat with the base against the seatback and at the correct installation angle. A firm fitment of the base in the vehicle is very important. The vehicle seat design will determine if the stabilising bar is in contact or not, it does not need to be.

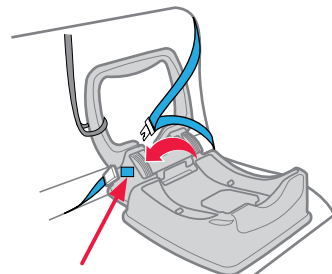

Blue **REARWARD-FACING BELT PATH** label


- Extend the seat belt to maximum length. For a lap-sash seat belt, engage the seatbelt tongue to the buckle. Feed the seat belt over the blue REAR-FACING SEATBELT PATH labels on each side and under both Belt Guide Hooks.

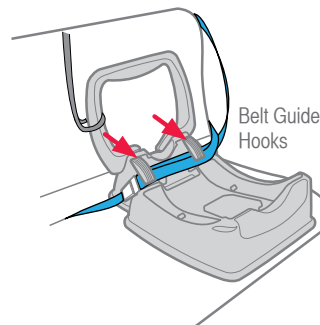

Do not remove the ISOFLEX™ straps from their storage location. Vehicle seatbelt can be used under the guide hooks at the same time.


## HOW TO INSTALL THE BASE - WITH SEATBELT

- C. Push downwards and rearward on the restraint base to compress it into the vehicle seat. Whilst compressed in the seat, pull on the lap belt to remove slack.
- D. If a lap-sash seat belt is used then allow the excess sash belt to feed back in to the retractor.

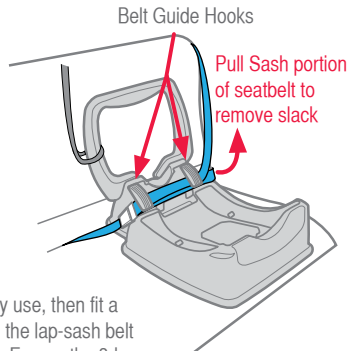

If the seat belt will not stay tight in every day use, then fit a gated 3-bar slide (not supplied with seat) to the lap-sash belt to prevent loosening. See pages 63 and 64. Ensure the 3-bar slide is removed when the Baby Capsule base is not installed to allow other uses to use the seatbelt as a lap-sash seatbelt.


- E. Locate the child restraint upper anchorage fitting in the vehicle that is directly behind the rear seat location chosen. Refer to the car owner's manual for the location (If there is no upper anchorage fitting then refer to pages 58 to 62 for instructions in adding an anchor fitting).
- F. Connect the top tether strap attachment clip to the anchor fitting in the car as detailed on page 29. Install top tether strap to the Baby Capsule as shown on page 29.

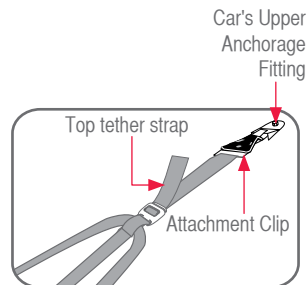

## HOW TO INSTALL - TOP TETHER STRAP




Once the Capsule is fitted to the base, refer to page 45.

- A. Lengthen the strap fully by pressing the adjuster button (1) and pull the strap (2) so that the strap is ready to attach to the Capsule.

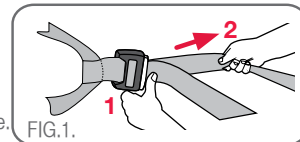


THIS TOP TETHER STRAP MUST ALWAYS BE FITTED WHEN THE BABY CAPSULE IS USED IN THE CAR.

- B. Feed the Top tether strap on the inside of the handle, around the front of the Capsule and through the Top Tether Strap guides in the front of the Baby Capsule.

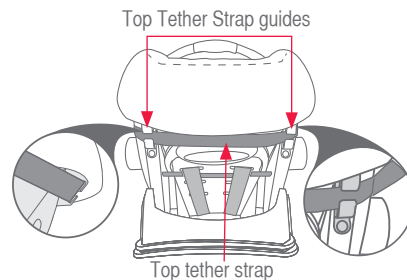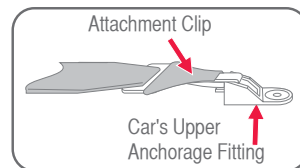

- C. Adjust the top tether strap by pulling as shown. Remove all slack in the straps. Do not over tighten. Do not allow the tension to lift the base from the vehicle seat.
- D. Roll up excess strap and place into the storage pocket attached to the top tether.

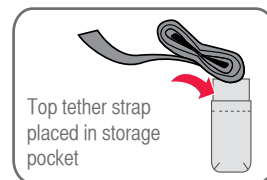

## HOW TO INSTALL - TOP TETHER STRAP



### IMPORTANT :

The Top tether strap must be fitted at all times when the baby is in the car when using either the seatbelt or the ISOFLEX™ connectors.

Always secure the loose end of the top tether strap to prevent it hanging out of the car or being accessible by the child.

THIS RESTRAINT IS NOT SUITABLE FOR USE WHERE THE TOP TETHER STRAP MAY FALL INTO A SPLIT IN THE SEAT BACK OR OFF THE SIDE OF THE SEAT.

Always ensure that the car seatbelt and top tether strap are firmly restraining the restraint on the vehicle seat.

**ALWAYS ATTACH TOP TETHER HOOK AND REMOVE SLACK IN THE TOP TETHER STRAP.**



### CAUTION:

**CHILDREN CAN BE INJURED OR RESTRAINTS AND TOP TETHER STRAP DAMAGED BY UNSECURED CARGO IN A COLLISION. SECURE OR REMOVE HAZARDOUS CARGO BEFORE USING THIS CHILD RESTRAINT.**


### REMOVING THE BASE FROM THE CAR

When removing the base, release the attachment clip from the car's upper anchor fitting then remove the seatbelt or remove ISOFLEX™ low anchorages.

## BABY CAPSULE SETUP

### HARNESS FEATURES

1. Outer crotch strap slot
2. Middle crotch strap slot
3. Low birth weight infant crotch strap slot
4. Outer lap strap slot
5. Low birth weight infant lap strap slot
6. Harness tongues & buckle
7. Shoulder harness strap
8. Low birth weight infant shoulder strap slots
9. Lower shoulder strap slots
10. Medium shoulder strap slots
11. Upper shoulder strap slots
12. Maximum shoulder height marker.
13. Harness Adjuster (under cover flap)

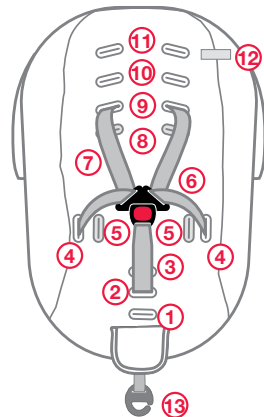

### FOR LOW BIRTH WEIGHT BABIES

The Baby Capsule is supplied with harness setup to suit an average birth weight, new born infant (approx 3.4kg). However, if your child is low birth weight or premature then you may need to reposition the harness to the "smaller infant" position, as follows:

Move the crotch strap to the inner slot **③** (see page 37) the lap straps to the inner slots **⑤** (see page 36) and the shoulder strap to the inner slot **⑧** see page 38. This will provide better support for smaller babies.

If the infant is newborn and over 3kg, generally you will need to use either slot **⑨** or **⑩** and crotch strap position **②**. Assess the harness fitment and adjust as necessary by following Setting Up The Harness, see page 39.

For low birth weight or premature babies with breathing difficulties or medical concerns, we recommend you seek medical advice before travelling.

## BABY CAPSULE SETUP

### LAP STRAP

The Baby Capsule is fitted with two lap strap positions. Correct location of lap strap will assist to correctly and securely position the infant in Baby Capsule.

The Baby Capsule comes supplied with the lap straps for an average birth weight baby (outer lap slot).


NOTE: As a low birth weight baby grows the lap strap will need to be moved to the outer lap slot.

### ADJUSTMENT OF LAP STRAP



Remove infant from the Baby Capsule prior to making adjustments.

- Remove the Baby Capsule from base as instructed on page 21.
- Lift Baby Capsule cover to reveal lap strap slot.
- From the top side of Baby Capsule turn the crotch 3-bar slide and push through each slot as shown right until the lap strap assembly is free from the Baby Capsule.
- Re-insert lap strap through the slot which will position lap strap level with the baby's thighs and feed back through other slot as shown right.

### LOW BIRTH WEIGHT LAP STRAP

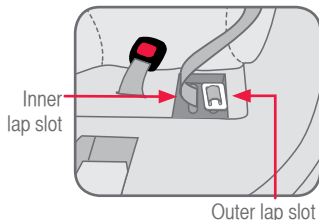

### AVERAGE BIRTH WEIGHT LAP STRAP

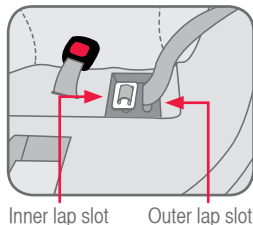

### IMPORTANT :

When replacing straps, cover and padded insert, ensure none of the straps are twisted and that all straps are secure by pulling each harness strap.

## BABY CAPSULE SETUP

### CROTCH STRAP

The Baby Capsule is fitted with three crotch strap positions. Correct location of crotch strap will assist to correctly and securely position the infant in Baby Capsule and will help prevent infant from slipping further down the Baby Capsule or slumping.


NOTE: The low birth weight position is shorter than other positions. This method can be used to position the buckle lower on the baby.

As baby grows the crotch strap must be moved to the outer slot.


### ADJUSTMENT OF CROTCH STRAP

Remove infant from the Baby Capsule prior to making adjustments.


- Remove the Baby Capsule from base as instructed on page 21.
- Lift Baby Capsule cover to reveal crotch strap slot.
- From the top side of Baby Capsule turn the crotch 3-bar slide and push it through each slot as shown right until the Crotch strap assembly is free from the Baby Capsule.
- Locate desired slot in shell, cover and padded insert (if fitted)
- Insert Crotch strap through desired slot and feed back through other slot as shown right.
- Ensure crotch strap is not twisted and positions the red button outwards.




### LOW BIRTH WEIGHT CROTCH STRAP



### AVERAGE BIRTH WEIGHT CROTCH STRAP



### LARGER BABY CROTCH STRAP



## BABY CAPSULE SETUP

### ADJUSTING THE SHOULDER STRAPS

Remove infant from the Baby Capsule prior to making adjustments.

- A. At the rear of the Baby Capsule, remove one of the harness shoulder straps from metal strap connector by slipping strap through open slot. The metal strap connector is shown in diagram right.
- B. Pull the shoulder strap through slot to the front of the Baby Capsule, through all the trims.


- C. Pass shoulder strap back through desired slot in padded insert cover and corresponding slot in the shell. The slot **MUST** position the shoulder strap level with or the next slot above the baby's shoulder.

If a Padded Insert is used, that will need to be re-positioned and the strap re-inserted when changing the slot position.



- D. Refit the shoulder strap to the metal strap connector. Ensure webbing is installed correctly over the bar.

Repeat straps A,B and C for the other strap.

Ensure both shoulder straps use the same height slot pairs.



Metal Strap Connector

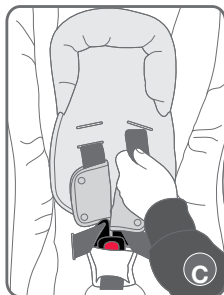

#### IMPORTANT :

When replacing straps, cover and padded insert, ensure none of the straps are twisted and that all straps are secure by pulling each harness strap.

## BABY CAPSULE SETUP

### SETTING UP THE HARNESS

This section covers the setting up of the harness to fit the infant. Fitting the harness is not required. Securing of the infant is covered later in the instructions.

- A. Sit the Baby Capsule on flat ground with the handle rotated fully back to prevent rocking.

- B. Lengthen the harness straps by pressing the harness adjuster (under the flap) and pulling both shoulder harness straps to slacken. Release the buckle.

- C. Move the two harness tongues to the sides of the Baby Capsule and store in the buckle tongue holder (if fitted) (holders are on both sides of the padded insert or the sides of the cover). Move the harness buckle towards the harness adjuster.

- D. Place baby into Baby Capsule lying on its back so that the buckle is between the legs.


- E. Determine which Baby Capsule straps require adjustment to fit the harness correctly. Confirm crotch strap adjustment first, followed by lap strap and finally shoulder straps. Adjust as required following the instructions:

Lap Strap - page 36


Crotch Strap - page 37

Shoulder Strap - page 38

Always remove baby from Baby Capsule prior to making adjustments.

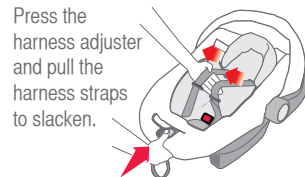


Buckle Tongue Holder (if fitted)

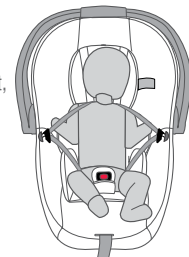

## BABY CAPSULE SETUP


F. The Baby Capsule is fitted with four shoulder strap positions. As the baby grows, the shoulder straps must be moved to higher slots.

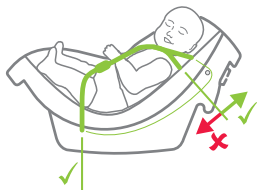


G. It is better to change one strap at a time so that the other strap will be a guide for re-assembly.

The shoulder straps must be in the slots which are nearest to the child's shoulders, but not lower than the child's shoulders.


LOW BIRTH WEIGHT INFANT




AVERAGE SIZE BABY



GROWING BABY



LARGER BABY



### IMPORTANT :


- Always adjust the height of the shoulder straps as the child grows
- Do not use the Capsule with the harness shoulder straps set at different heights or fed through mismatching slots.
- Ensure the harness straps are not twisted and that all straps are secured by pulling each harness strap.
- Only fit the straps over the bar otherwise the harness will not tighten.

## HOW TO USE

### PLACING INFANT IN CAPSULE


If your child is of low birth weight or less than 3kg then you will probably need to use the harness arrangement for low birth weight babies. Refer to page 35.

When positioning baby into Baby Capsule make sure baby's back is fully supported onto the flat section and the baby's nappy area (bottom) is resting in the bottom curvature as shown. It is recommended that bulky nappies are not used when baby is travelling in the Baby Capsule.

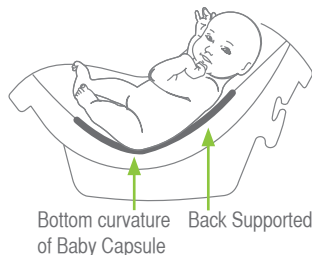

A. Loosen shoulder straps by pressing the harness adjuster and pull both shoulder straps evenly. Pull out the desired amount of slack.


Press the harness adjuster and pull both harness straps evenly to loosen.



## HOW TO USE


- B. Place the two harness tongues into the Buckle Tongue Holder (if fitted).

Move the harness buckle towards the harness adjuster for easier fitment next time you put the infant in the Capsule.

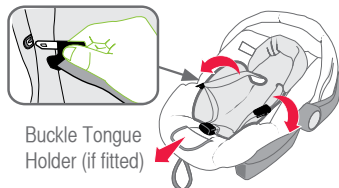

Buckle Tongue Holder (if fitted)

- C. Place baby into Baby Capsule lying on its back so that the buckle is between the baby's legs. Ensure that baby's arms and legs are free. Make sure baby is dressed to allow the Harness Buckle to be pulled up between baby's legs e.g. a jump suit.

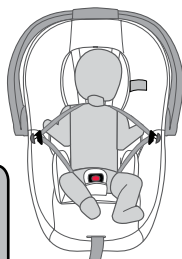

### NOTE:

1. Discontinue using the Padded Insert when shoulder straps are in the top slots or if the Pad causes over heating, discomfort or you need more room for baby to grow.
2. Correct fitment of the harness is very important as it restrains the baby in the Baby Capsule. The harness must fit firmly around upper torso of the baby and be positioned so as to leave the baby's arms and legs free.




### CAUTION:

Do not harness an infant wrapped in a blanket or swaddled as this increases the risk of ejection and injury or death in a crash. The harness needs to fit firmly to the baby, any blanket or other covering may be placed over the harness after the harness is adjusted. Arms and legs must be free and not bound. The legs must sit on each side of the crotch strap.




## HOW TO USE

- D. Place each arm through each shoulder strap of the harness. Position the buckle of the crotch strap as shown right.

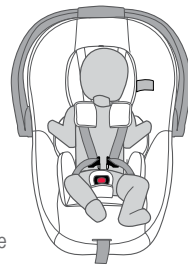

- E. Fit either harness buckle tongues into the harness buckle followed by the other tongue. A click is heard when the last tongue is fully engaged.

Should the second tongue not insert - press the red button and reinsert the tongues. Ensure secure engagement by pulling harness straps. If the harness buckle does not engage correctly then it may require cleaning or need replacement, refer to page 52. **The buckle tongues are fully engaged when both tongues are inserted and 'click' is heard.**




## HOW TO USE

- F. Ensure slack is removed from the lap straps by pulling the shoulder harness straps through the buckle tongues, then pull the Harness Adjustment Strap to take up the slack in the harness, adjusting to a firm but comfortable fit. Make sure that the baby's arms and legs are free and the crotch strap is between the legs. Check that the slack in straps is minimal.


Do not use the restraint if straps do not tighten and contact Customer Service.

Pull Harness Straps through the buckle in direction of arrows



Pull harness adjustment strap to remove slack.

Hook the harness adjuster strap on to the loop to prevent tripping over the strap.

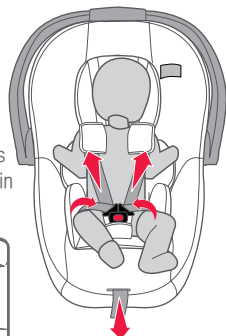

### CAUTION: A LOOSE HARNESS IS DANGEROUS

The end of the harness adjustment strap is connected to the cover to avoid tripping over the end when carrying the Capsule. Ensure the harness adjustment strap hook is attached when carrying the Capsule.

The infant should be harnessed correctly whenever placed in the Baby Capsule. Do not carry an unrestrained infant in the Baby Capsule.




### WARNING: DO NOT LEAVE CHILDREN UNATTENDED IN THE CAR.

## HOW TO USE

### PLACING BABY & BABY CAPSULE ONTO BASE


This is the same process for either ISOFLEX™ or seatbelt installation.

- A. Position the Baby Capsule over the top of the base. Lower the Baby Capsule into position. Check there are no loose straps caught between Baby Capsule and Base.
- B. Push down on the Baby Capsule until an audible click is heard. Pull upwards on the Baby Capsule to check it is correctly locked into position.

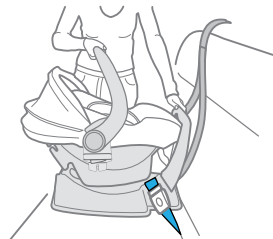


**IMPORTANT:** Lift again to check engagement.

- C. Attach the top tether around the Baby Capsule by feeding through the handle and onto the top tether strap guides as shown.

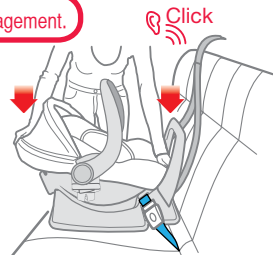

Top Tether Strap guides

- D. The handle may be rotated into other positions if desired, although this may be difficult due to the front seat position.
- E. Always secure the loose end of the top tether strap in the pocket on the top tether strap to prevent it hanging out of the car or being accessible by the child.

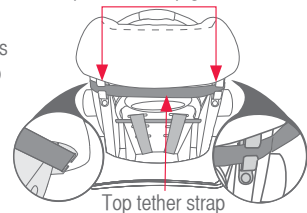


Top tether strap

## HOW TO USE

### REMOVING BABY & BABY CAPSULE FROM BASE

- Loosen the top tether strap. Ensure that the adjuster does not fall on the baby.
- Remove the top tether strap from the tether strap guides on the Baby Capsule.
- Place top tether strap between the stabilising bar and the car seat back so that it will not fall behind the seat or get trapped in the door. This will keep the top tether strap visible and ready for use when the Baby Capsule is put back in the car.
- Rotate the Carry Handle to the "carry position" as shown.
- Grasp the handle with one hand then pull the Baby Capsule release catch with the other hand. With the catch lifted raise the Baby Capsule clear of the base.

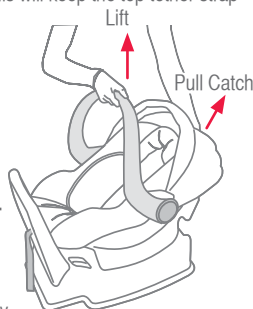

**Always ensure the handle is locked in position before lifting.**


- When the Baby Capsule is clear of the base, carefully remove it from the car.

Ensure the harness adjustment strap hook is connected to the loop.



#### CAUTION:

The end of the harness adjustment strap is connected to the cover to avoid tripping over the end when carrying the Capsule. Ensure the harness adjustment strap hook is attached when carrying the Capsule.




Hook the harness adjuster strap on to the loop to prevent tripping over the strap.

## HOW TO USE

### REMOVING BABY FROM BABY CAPSULE

- Rotate the carry handle to the "non-rocking position" and ensure the Canopy is fully open.
- Press the Harness Adjuster while pulling both shoulder straps evenly to loosen the harness.
- Press the red button on Harness Buckle to release both harness tongues. Place buckle tongues through buckle tongue holder's (if fitted) on each side of the cover or padded insert otherwise place straps on each side of the Capsule clear of the infant.
- Feed the infant's arms through each side of the harness. Lift the baby out of the Capsule.



Buckle Tongue Holder (if fitted)

**NOTE:** Once the baby gets heavier you may wish to leave the Capsule in the car. In this case you will need to disconnect or loosen the top tether strap before removing the baby.



## HOW TO USE

### TO FIT AND USE THE CANOPY

- A. Push the two plastic frame sections at both sides onto the Baby Capsule at the inside of the handle pivot.
- B. Refit the elastic Canopy strap to the dedicated elastic trim strap on each side of the Baby Capsule.


**NOTE:** Elastic Canopy loops must always be fitted when Canopy is in use.

- C. The Canopy can be rotated to cover the baby or folded by rotating to the desired position.

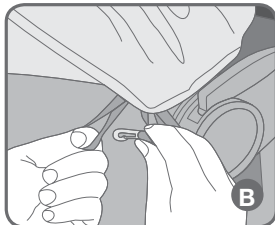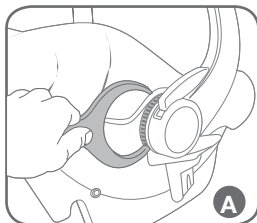

### TO REMOVE CANOPY

- A. Ensure Canopy is in the collapsed position. Unclip the elastic Canopy straps which are secured by plastic hooks under each handle attachment point.
- B. Grasp the Canopy and pull it away from the Baby Capsule ensuring the straps are clear of catching any objects.



## HOW TO INSTALL IN AN AIRCRAFT

### HOW TO INSTALL USING AIRCRAFT LAP BELT

The Baby Capsule without base is suitable for use on aircraft.

The Baby Capsule must be used in accordance with the aircraft operators procedures, and any directions or instructions from the aircraft operator, pilot or crew.

The Baby Capsule may not fit in smaller aircraft and cannot be used with aircraft seatbelts that contain airbags unless they can be disabled.

Inform the aircraft operator that a child restraint is intended to be used on the aircraft when booking the flight as the child restraint may not be suitable for use in that operator's specific aircraft.

For use of the child restraint in cars in countries other than Australia and New Zealand, The user should consult the country's local authorities, car hire companies, car insurance companies, etc. for advice. The child restraint may not be acceptable for use in all cars.

### FIT THE BABY CAPSULE TO THE AIRCRAFT SEAT

The top tether strap is not required to be used to fit the child restraint in aircraft. You do not need the base onboard the aircraft. We recommend that you store the excess strap and hook in the pocket provided and check-in the base with your luggage for use at the destination.


- A. Position the Baby Capsule rearward facing, align it centrally within the allocated seating position. If possible, lift the armrests out of the way to improve access to installing the aircraft lap belt and to suit the width of the Capsule.

- B. Carefully remove cover on the side to reveal

### AIRCRAFT REARWARD-FACING BELT PATH label marked in green.


**NOTE:** Never use this path in a car. Always replace cover after use.

### AIRCRAFT REARWARD-FACING BELT PATH marked in green.




# HOW TO INSTALL IN AN AIRCRAFT


- C. Place handle in "non-rocking" position, that is, fully backwards. Fully lengthen lap belt. Thread the lap belt into **AIRCRAFT REARWARD-FACING BELT PATH** lap belt path (green marker) as shown, ensuring that lap part is below the hook as shown, on each side. Engage lap belt buckle and tongue.



Ensure lap belt is under the hook on each side




- D. Push down on the Baby Capsule and remove all slack from the lap belt. Pull belt strap to tighten, ensure a firm fit of the Baby Capsule to the seat.



Remove slack

Do not use this restraint with aircraft seatbelt that contain airbags unless they can be disabled.

Do not use with a seatbelt extender that causes the buckle to enter the hook area of the aircraft belt path.

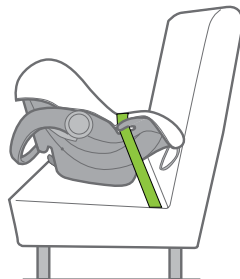

# HOW TO INSTALL IN AN AIRCRAFT

The Baby Capsule base may be included with 'checked in' luggage (for use after flight). Aircraft label is located on the underneath of the Baby Capsule. It demonstrates suitability for use on aircraft.



This Child Restraint System meets the standards for use in aircraft as recommended by the Civil Aviation Safety Authority of Australia and the Civil Aviation Authority of New Zealand.


Only to be used on aircraft with the permission of the aircraft operator, pilot and crew.

**SUITABLE FOR REAR FACING USE**

The top tether strap is not required to be used onboard aircraft and should be stowed securely.

## REPLACE COVER OVER AIRCRAFT BELT PATH

Refit cover and replace all clips.  
Ensure belt path marker is covered after use.



## CARE & MAINTENANCE

### REGULAR CARE OF THIS RESTRAINT:

Please check the following items regularly to ensure the safety of your child:

- A. Check the webbing straps for fraying,
- B. Check there are no cracks in moulding,
- C. Check the harness adjuster is operating and is clamping the webbing,
- D. Ensure the buckle is free of fluff, liquid or other matter that may enter the buckle slots.  
Clean the buckle if it is sluggish to engage. See next page.
- E. If any part of the restraint is cracked, broken or not operating seek repair immediately  
- contact Britax Customer Service 1300 303 330

### CLEANING CAR SEAT

**HARDWARE:** Use only mild soap to clean all metal and plastic parts of your child restraint, using a damp sponge or cloth. Do not use chemicals or cleaning agents. Do not try and place any hardware into a washing machine.

**STRAPS/HARNESS:** We recommend spot cleaning straps and harness with a damp sponge or cloth using only cold or warm water. Never place any straps or harness into a washing machine or tumble dryer.

## CARE & MAINTENANCE




### BUCKLE OPERATION

To ensure the buckle remains operational the inside of the buckle must be kept free of liquids, sand, dirt, fluff, food or similar substances. If the buckle is not operating or you do not hear a strong audible click when second tongue is inserted then the buckle needs to be washed or replaced. The buckle is fully engaged when both tongues are inserted . Contact Customer Service for assistance.

### TO CLEAN HARNESS BUCKLE:

If sticky liquids such as baby formula, fruit juice, etc. get inside your harness buckle, it may become sluggish. An indication of a sluggish harness buckle is that you cannot hear a click when engaging the last harness tongues. To restore the harness buckle to good working order it needs to be cleaned as follows:

- A. Remove the harness buckle from the restraint: From the underside of the restraint pull each crotch strap 3-bar slide, turn the 3-bar slide on its side and push back through the slot.
- B. Place the harness buckle under warm (max. 40 degrees Celsius) running water as shown below. Let the water run through the mouth of the buckle for five minutes. Check the harness buckle is clean by engaging the harness tongues and buckle several times until you hear a click.
- C. If you still cannot hear a strong audible click then repeat the cleaning process several times.
- D. Refit the harness buckle to the restraint ensuring the red button facing outwards and the 3-bar slide is fed through the same slots.



**If the Harness Buckle cannot be returned to its original working condition then contact BRITAX Customer Service for assistance.**

## CARE & MAINTENANCE

### COVER (STYLE MAY VARY)

The restraint has a flame retardant cover which is removable for cleaning. Cleaning instructions are on the care label attached to the cover. If fluffy cover is fitted then washing the cover prior to use will remove excess fluff.

The cover has been designed to protect your child when seated in the restraint. Care should be taken if children either eat or drink while in the restraint as some food or drink products may cause damage or marking to the cover. Wash or clean immediately.

Do not pull sticky items from covers as the cover may be damaged - soak in water and gently remove.

To keep your product looking its best, take care when using while wearing jewelry or other items that could snag.




### VERY IMPORTANT:

**Only replace the cover with Safe-n-Sound supplied replacement cover with identical shoulder height markers or a replacement cover meeting AS/NZS 8005.**


## CARE & MAINTENANCE

### TO REMOVE THE COVER

- A. Remove the Canopy (see page 46) and padded insert (if supplied) as described on page 55. Unclip the two Baby Capsule cover straps which are secured by plastic hooks under the handle attachment point.
- B. Disconnect the shoulder harness straps from the Metal Strap Connector and feed through shoulder slots in both Baby Capsule and cover. Refer to page 36.
- C. Feed the shoulder harness straps and tongues through lap strap slots in the Cover only. There is no need to remove the harness straps from the Baby Capsule.
- D. Lift the cover around the rim of the Baby Capsule at the harness adjuster end, feed the crotch buckle through the slot in cover and pull the harness adjuster strap out of the slots.
- E. Remove the cover for cleaning.



Unhook clips on either side of cover under the handle then remove cover




Pull cover off from the corners


## CARE & MAINTENANCE

### TO REPLACE THE COVER

- A. Place the cover over the Baby Capsule ensuring all slots in cover line up with slots in Baby Capsule.
- B. Ensure that there are no twists in any straps underneath the Baby Capsule.
- C. Feed the shoulder harness straps through lap strap slots in cover.
- D. Feed the shoulder harness straps through the shoulder strap slots in cover and then in through the Baby Capsule. **You MUST thread the shoulder strap OVER cross bar** and then re-attach the straps to metal strap connector at the back of the seat. Refer to page 36 to 38 for harness setup for your baby. Attach the shoulder harness straps to the strap connector.
- E. Feed the crotch buckle as well as the harness adjuster strap through the slots in the cover.
- F. Refit plastic hook on each side of the cover to Baby Capsule as shown right.
- G. Engage shoulder harness tongues and crotch buckle. Pull to check harness is attached.
- H. **Ensure the straps are not twisted.**




Pull elastic cover over Baby Capsule



ALWAYS OVER THE BAR

Metal Strap Connector



Plastic Hooks

## ACCESSORIES


Use of aftermarket accessories, that is, accessories not provided with this child restraint can reduce the safety of the child restraint and may cause injury or death. Always follow the instructions covering the use of accessories in this section or the instructions provided with accessory. If an aftermarket accessory is used that is not recommended by Britax then ensure that the accessory is for this restraint compliant with AS/NZS 8005 and stated as suitable for use with this child restraint.

The following instructions apply to accessories that may be supplied with this restraint at point of purchase. If not, a variety of Safe-n-Sound accessories are available from various retailers of Safe-n-Sound products.

### PADDED INSERT - Style may vary

The Padded insert is only required for supporting the smaller baby and must be removed once baby's shoulders reach the upper shoulder height marker to allow longer use of the Capsule.

- A. Disengage the harness buckle and feed the buckle out through buckle slot in the padded insert.
- B. Remove the insert pad by removing the shoulder harness straps from the metal strap connector and feeding the shoulder harness through the slots. See page 36.
- C. Discontinue using the Padded Insert when shoulder straps are in the top slots or if the Pad causes over heating, discomfort or you need more room for baby to grow.

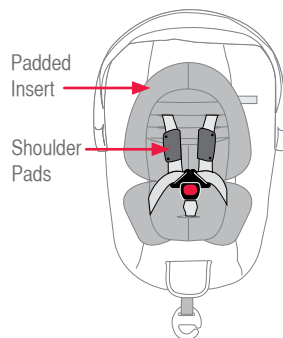


Padded Insert

Shoulder Pads

## ACCESSORIES

### HEAD PILLOW - Style may vary

The head pillow is only required for supporting the smaller baby and can no longer be used once the harness shoulder straps are in the top pair of slots. The pillow is fitted to the Capsule by ties on the back of the pillow being threaded through the next pair of slots above the harness shoulder strap. Ensure the ties are threaded through slots in the backrest of the main moulding and tied together.

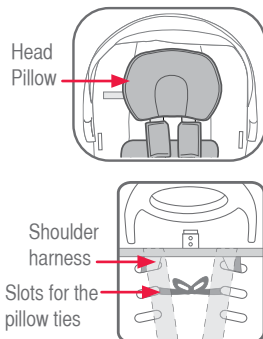

### CANOPY

Refer to page 46.


### SHOULDER PADS - Style may vary

The shoulder pads may require release by press studs. If fully fitted to the shoulder strap then you will need to disconnect the shoulder strap as described on page 36.

## ACCESSORIES

### EXTRA BASE

An Extra Base is available as a separate purchase for a second car. This allows the Capsule to be easily and quickly switched between cars. The top tether strap is supplied with the Base.



### OTHER ACCESSORIES

Only use accessories designed and recommended by Britax Childcare Pty Ltd for this product.

## INSTALLATION OF CAR'S UPPER ANCHORAGE POINT

Consult the vehicle owner's handbook for location of anchorage fittings or anchorage points and the possible use of spacers. Some vehicles may have an anchor fitting fitted by the vehicle manufacturer. If anchorage points cannot be found refer to car manufacturer or local child restraint fitting station or traffic authority for optimum position of upper anchorage point and the use of spacers.

### UPPER ANCHORAGE STRAP



#### IMPORTANT:

THE ATTACHMENT CLIP COVER MUST ALWAYS BE USED AS IT PREVENTS THE RISK OF INCORRECT FITMENT OF THE ATTACHMENT CLIP TO THE UPPER ANCHORAGE POINT. ALWAYS ENSURE THAT THE ATTACHMENT CLIP IS CORRECTLY ENGAGED TO THE UPPER ANCHORAGE POINT AND NOT HOOKED OR FITTED TO ANY OTHER OBJECT BEFORE EACH USE OF THE RESTRAINT. THIS IS ESPECIALLY IMPORTANT IN VEHICLES SUCH AS STATION WAGONS, VANS, HATCH BACKS OR VEHICLES WITHOUT A FIXED PARCEL SHELF, SINCE THE ANCHOR POINT IS USUALLY NOT VISIBLE.

#### IMPORTANT INSTALLATION NOTE:

In some vehicles the upper anchorage point in the rear vertical panel can only be installed in one way. Please refer to vehicle owner's handbook or a child restraint fitting station for correct method.


## INSTALLATION OF CAR'S UPPER ANCHORAGE POINT

Extension Strap distance to be measured.

Length 300mm (Use Britax Safe-n-Sound part 0035 or 0291).

Length 600mm (Use Britax Safe-n-Sound part 0036 or 0290).

Available from all major child restraint retailers.

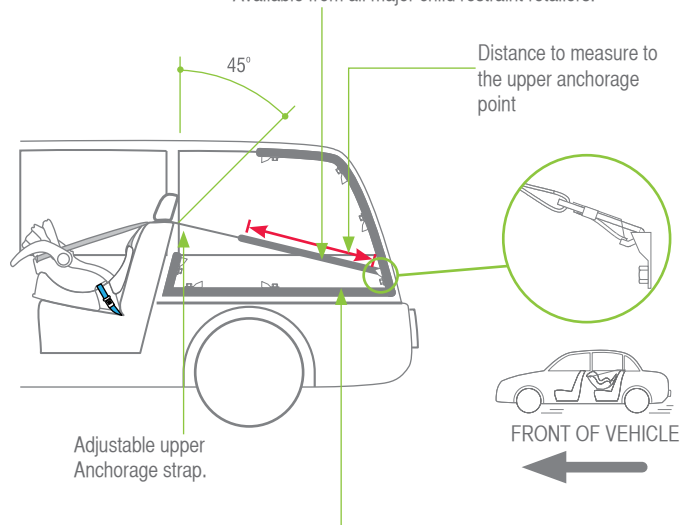

The shaded areas of this diagram illustrate the possible locations of the upper anchorage point. Within each shaded area is an upper anchorage point showing the correct way to install the fitting. Ensure the upper anchorage point is aligned as illustrated unless stated otherwise in the vehicle owner's handbook.


## INSTALLATION OF CAR'S UPPER ANCHORAGE POINT

### IF THE CAR IS FITTED WITH CHILD RESTRAINT UPPER ANCHORAGE POINT

Locate the upper anchorage point behind the rear seating position. (Consult the car owners handbook for the location of the upper anchorage point). The upper anchorage point should be directly behind and central to the restraint. Remove thread plug from the parcel shelf/floor/roof, etc. and install attachment bolt and fitting as shown in Fig 1.

**CAUTION: DO NOT OVERTIGHTEN ATTACHMENT BOLT. OVERTIGHTENING MAY FRACTURE OR BREAK BOLT.**  
**MAXIMUM TORQUE IS 20 Nm (14.75 ft.lb.)**

Note: Minimum of five full turns of attachment bolt is required before tightening force is applied.

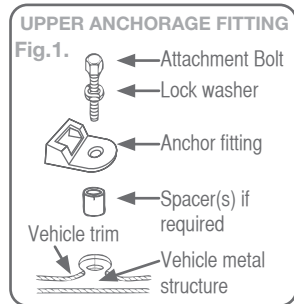


## INSTALLATION OF CAR'S UPPER ANCHORAGE POINT

### IF THE CAR IS NOT FITTED WITH CHILD RESTRAINT UPPER ANCHORAGE POINTS

**For Sedans only** - Drill 9mm diameter hole in the parcel shelf on the centre line of the seating position as shown in Fig 3. Before drilling the hole, check the underside for accessibility. Install the attachment bolt as shown in Fig 2. It is recommended that this installation be carried out by a child restraint fitting station or licenced motor mechanic.

**For vehicles other than Sedans** - In Australia, consult your nearest child restraint fitting station or traffic authority for vehicle inspection to find the best, correct position for the placement of the upper anchorage point, and for the correct attachment bolt length and use of spacers. In New Zealand, consult the agent for the vehicle. Note to Queensland purchasers: The installation of anchorage points must be approved by authorised officers appointed by Queensland Transport. Authorised officers can be sourced from all Queensland Transport Customer Service and Queensland Ambulance Service Centres.

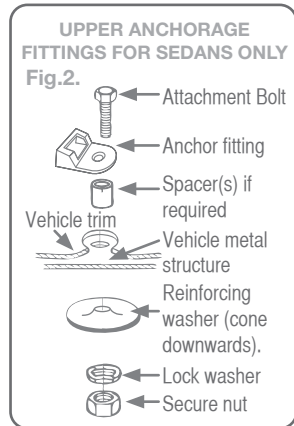

## INSTALLATION OF CAR'S UPPER ANCHORAGE POINT

ONLY USE A 5/16 UNC GRADE 5 BOLT. IF THE BOLT IS NOT THE CORRECT LENGTH THE CAR MANUFACTURER'S HAND BOOK CAN PROVIDE ADVICE ON THE CORRECT LENGTH BOLT.



### WARNING

CHILD RESTRAINTS MUST NOT BE ATTACHED TO UNSOUND METAL OR TO WOOD, OR SYNTHETIC STRUCTURES. WHEN DRILLING 9 MM HOLE DO NOT DRILL THROUGH FUEL LINES, FUEL TANKS, ELECTRICAL WIRING, OR RADIO SPEAKERS.

WEBBING STRAPS MUST BE PROTECTED FROM SHARP CORNERS AND EDGES. THE ANCHOR FITTING MUST BE USED ONLY AS DESCRIBED ABOVE. IT MUST NOT BE HOOKED ONTO ANY OTHER OBJECT.

### CAR INSTALLATION ACCESSORIES

(From retailers of Safe-n-Sound products)



**EXTRA ANCHOR KITS:** Available for using the restraint in additional cars.

Re-order no: 0038 or 0289

**EXTENSION STRAPS:** May be required for cars without a fixed parcel shelf.

Re-order no: 0035 or 0291 (length 300mm) or  
0036 or 0290 (length 600mm)

**GATED 3-BAR SLIDE (Locking clip):** For converting lap-sash seat belt to lap belt, and to obtain a better fit to the car where the fitted lock-off may not be suitable. Most cars will not need this. Re-order no: 0215.

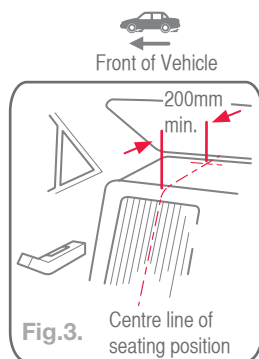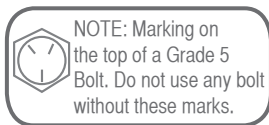


## ALTERNATIVE INSTALLATION IF SEATBELT LOOSENS

### LAP-SASH SEAT BELT


If a seat belt will not stay tight, then a Gated 3-Bar Slide may be used to prevent loosening. Obtain this part from most retailers of Safe-n-Sound products.

There may be two types of Gated Slides available, Curved and Flat.

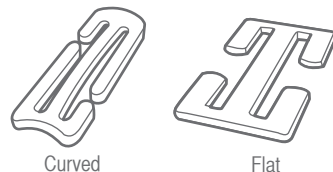


Before using the restraint, convert the lap-sash seat belt by using the Gated 3-Bar Slide.


- A. Hold the lap and sash straps together and fold as shown. Slide the inner strap into the Gated 3-Bar Slide followed by the outer strap.



- B. The two straps should slide freely in the Gated 3-Bar Slide slot.



- C. Repeat previous step A for the other slot in the Gated 3-Bar Slide.

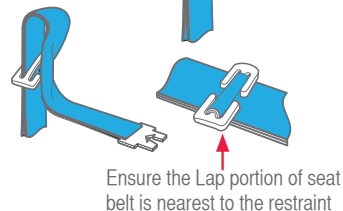


## ALTERNATIVE INSTALLATION IF SEATBELT LOOSENS

D. Feed the straps through the Gated 3-Bar Slide to remove any slack.


When fitting the Curved Gated Slide, the seat belt route can only go one way, as shown above.

Use this seat belt configuration to install the child restraint according to the instructions on pages 27 to 28. Remove any slack in the lap belt to ensure the base is held firmly against the seat back. This may require adjustment of the strap through the gated 3-bar slide.

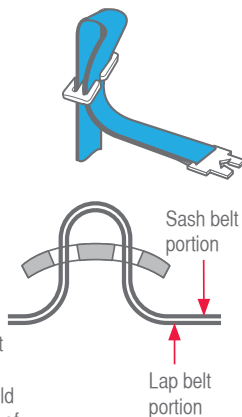

### **IMPORTANT:**

Remove the gated 3 bar slide from the seat belt as soon as the child restraint is removed so that an adult can use the seat belt as a lap-sash seatbelt.

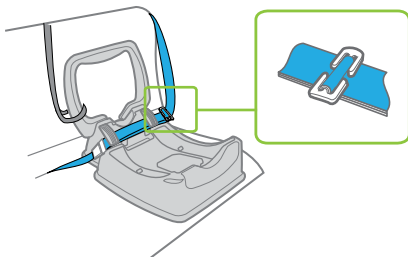

## TRAVEL SYSTEM

This Baby Capsule is designed to be connected to compatible strollers. The following pages provide general instructions about using the Baby Capsule with a stroller, this may differ slightly for some strollers. Use the attachment instructions provided with your stroller. Use the stroller in accordance with the instructions supplied with the stroller. This Baby Capsule will not fit all strollers.

There are two methods of connecting the Baby Capsule to the stroller. Check with the stroller instructions or promotional literature to see which system applies.

- Integral latch which fits to the arm bar or tray, or
- Britax CLICK & GO™ Adaptor (not supplied) that fits to the receivers on the stroller side armrests.

The stroller instruction manual will provide full instructions on use of the stroller.

### **WARNINGS**

**DO NOT LEAVE THE CHILD IN THE BABY CAPSULE FOR EXTENDED PERIODS.**

**THE TRAVEL SYSTEM BABY CAPSULE IS DESIGNED TO PROVIDE MOBILITY OUTSIDE OF THE CAR BUT IT SHOULD NOT BE USED IN PLACE OF AN APPROPRIATE COT.**

**THE BABY CAPSULE MUST ONLY BE USED WITH STROLLERS WITH COMPATIBLE ATTACHMENTS. WE RECOMMEND SAFE-N-SOUND AND STEELCRAFT STROLLERS.**

**IF IN DOUBT ABOUT THE METHOD OF INSTALLATION, CONTACT BRITAX CHILDCARE CUSTOMER SERVICE ON 1300 303 330 AU/ 0508 688 822 NZ.**

# TRAVEL SYSTEM

## INTEGRAL LATCH


### INSTALLATION INSTRUCTIONS PREPARING THE BABY CAPSULE - LATCH METHOD

You may need to remove the Britax CLICK & GO™ Adaptors (see page 71 to 73) to enable fitment on some strollers when using the integral latch system.

- Remove baby from Baby Capsule.
- Rotate handle into "carry position", then lift the release catch with the other hand.
- With the release catch depressed lift the Baby Capsule clear of the base hooks, and remove from the car.

### PREPARING THE STROLLER

- Ensure the Stroller has been assembled correctly.
- Open the Stroller, apply the brakes.
- Before fitting the Baby Capsule check and ensure all latches are engaged to prevent the stroller folding inadvertently.
- Lower the backrest to the fully reclined position.
- Remove the arm bar cover and store in the basket pocket.

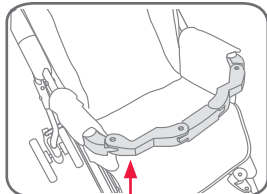

Arm Bar cover removed


\* Refer to page 22 for handle position

# TRAVEL SYSTEM

## INTEGRAL LATCH

### INSTALLING THE BABY CAPSULE INTO THE STROLLER - LATCH METHOD

- Ensure that the arm bar (or tray) is fully locked in position on both sides of the armrests.
- Position the Baby Capsule over the Stroller with the baby's head end of the Baby Capsule over the Stroller arm bar (or tray).
- Lower the Baby Capsule and ensure that it locates onto the Arm Bar, (or tray) and the latches engage.

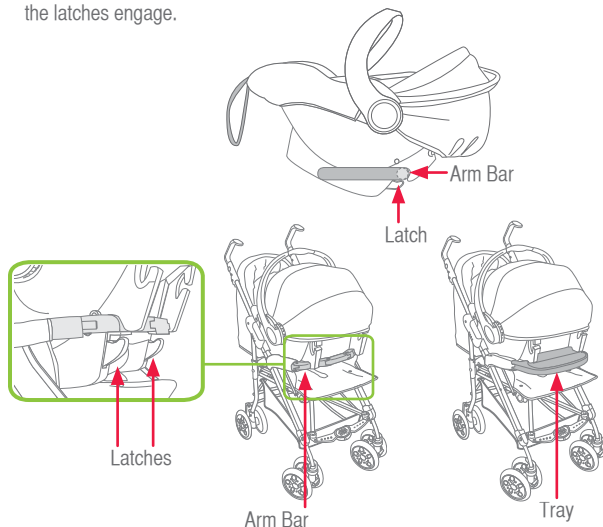

## TRAVEL SYSTEM INTEGRAL LATCH


D. Then lower the foot end of the Baby Capsule until it rests on the seating surface of the stroller.

E. Check the Capsule is securely attached to the stroller arm bar by lifting the Capsule before use.

F. Fold the Baby Capsule handle down if required.

**NOTE: Do not lift the stroller by the Capsule as it may disengage.**

Refer to the Stroller instruction book for all other instructions.

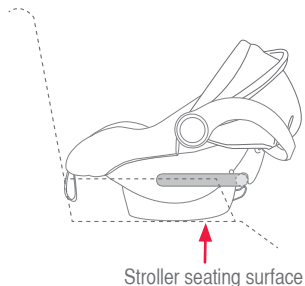

## REMOVING THE BABY CAPSULE FROM THE STROLLER

A. Rotate the Baby Capsule handle to the "carry position" and grip firmly in one hand.

B. Raise the Baby Capsule release catch located on the rear of the Baby Capsule.

C. Lift the Baby Capsule clear of the stroller.

ENSURE THE BABY IS SECURED IN THE BABY CAPSULE WITH THE HARNESS AT ALL TIMES. THE BABY CAPSULE IS FITTED WITH A CANOPY WHICH CAN BE USED WHEN THE CAPSULE IS CONNECTED TO THE STROLLER. THE CANOPY CAN ALSO BE USED IN THE CAR.

\* Refer to page 23 for handle position


## TRAVEL SYSTEM BRITAX CLICK & GO™ ADAPTOR

### ATTACHING THE BABY CAPSULE TO THE STROLLER FRAME

If the Baby Capsule is fitted with Britax CLICK & GO™ Adaptor, then fit as follows:

A. Remove Stroller seat or Carry cot from stroller frame (refer to your stroller instructions).

B. The Baby Capsule may only fit the stroller in one direction. The Baby Capsule should face the Stroller handle. With the Baby Capsule handle in the upright position, place the CLICK & GO™ adapters over the stroller frame sockets and push the Baby Capsule into the socket. The adapters will lock the Capsule to the stroller.



Secure your baby into the Baby Capsule with the harness provided on the Baby Capsule. Britax CLICK & GO™ receiver set may be required for compatibility with some strollers.



### IMPORTANT :


Only use Baby Capsule with compatible Britax/Steelcraft Stroller or with other brand strollers that have an approved Britax CLICK & GO™ receiver.

Pull upwards on both sides of the Baby Capsule to confirm it is locked into the frame. If not locked on both sides, repeat above steps.

## TRAVEL SYSTEM BRITAX CLICK & GO™ ADAPTOR

### RELEASING THE BABY CAPSULE FROM THE STROLLER FRAME

- A. Squeeze both carry handle release latches and rotate the handle upwards, into the “carry position”.
- B. Squeeze the left and right triggers of the CLICK & GO™ adaptors on your Baby Capsule with both hands. De-latch the Baby Capsule from the stroller frame.

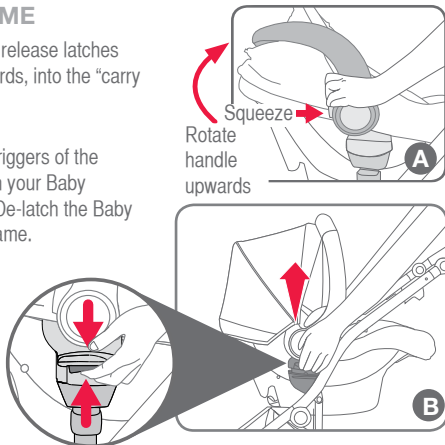

- C. Lift and remove the Baby Capsule away from the frame.



#### CAUTION:

Never fold the stroller frame with an Baby Capsule attached.  
Remove the Baby Capsule before folding the stroller frame.

\* Refer to page 22 for handle position




## TRAVEL SYSTEM BRITAX CLICK & GO™ ADAPTOR

### HOW TO REMOVE THE BRITAX CLICK & GO™ ADAPTOR

To remove the Britax CLICK & GO™ Adaptor, ensure handle is in “rocking position”.

Cover removal is not necessary.

- A. Unclip the two Baby Capsule cover elastic straps which are secured by a plastic hook under the handle pivot.
- B. Carefully remove the screw with a screw driver. Remove the Locking Pin. Pull out the adaptor from carry handle.

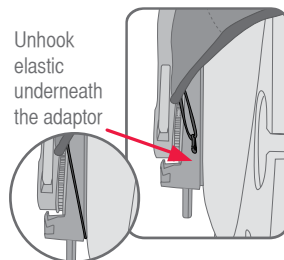

- C. Store for future use with these instructions.


## TRAVEL SYSTEM

### BRITAX CLICK & GO™ ADAPTOR

#### HOW TO REPLACE THE BRITAX CLICK & GO™ ADAPTOR


A. To attach the Britax CLICK & GO™ Adaptor to the Baby Capsule ensure the Capsule's Handle is in "Rocking position" ②, disconnect the elastic under the handle boss and pull the trim away from the side of the Capsule to align the holes.

B. Align the Adaptor in the recess under the handle boss, push up and click into place.




Push in under handle

C. Insert Locking Pin into hole. Align both top and bottom holes.



Push in Locking Pin


D. Locate screw into the bottom hole and tighten with screw driver.




## TRAVEL SYSTEM

### BRITAX CLICK & GO™ ADAPTOR

E. Now replace the trim pull elastic underneath the adaptor and hook. Place elastic in groove shown below.



Hook elastic behind the adaptor and place in groove.

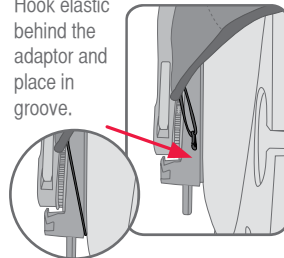

## TRAVELLING TIPS

### SAFETY

**Never hold a baby in arms when riding in a motor vehicle. In this position the baby could be thrown against the dashboard, windscreen or other occupant and suffer serious injury or death.**

**When riding in a motor vehicle never nurse a baby and use the same seat belt for both of you. In this position the baby or child could be crushed.**

**Never breast feed a baby while car is in motion.**

Children must be secured in appropriate restraints at all times when the car is in motion. Children travelling unrestrained and standing up in the car are in danger of serious injury or death. Traffic regulations in all states require children to be secured in child restraints or adult seat belts where available.

Plan your trip with frequent comfort stops to reduce stress on babies, young children and driver. Keep the car well ventilated to reduce heat stress. Car windows should be kept open to maintain a good flow of fresh air.

**Never leave babies or toddlers in a stationary car because of the risk of heat exhaustion.**

Ensure babies and toddlers are adequately shaded from direct sunlight through side or rear windows.

Check the car is ventilated by use of open windows or using the car's ventilation system taking in external air. Recirculation setting is not suitable for providing ventilation.

Be on guard against carbon monoxide poisoning which can occur through only a slight leak in the exhaust system while travelling in a closed car.

Securely stow all heavy objects, feeding bottles, etc. that could become missiles during an accident and cause injury to any occupant.

### CLOTHING/BATHING

Since it is often warmer in the car, dress the baby in light clothing.

**Do not harness an infant wrapped in a blanket or swaddled. Any blanket or wrap must only be placed over the harness and infant.**

## IN CASE OF CRASH

If your restraint has been involved in a severe crash, you should destroy the restraint even if no damage is obvious. Some insurance companies offer vehicle insurance which covers or partially covers the replacement of your child restraint. Contact your insurance company for further details. Your insurance company may require you to keep the child restraint for assessment, **but do not use the child restraint after a severe crash.** To assist you in making an accident insurance claim cut the following statement and include it with your claim.

### NOTICE TO INSURANCE COMPANY CHILD RESTRAINT INVOLVED IN AN ACCIDENT

- All Britax Safe-n-Sound child restraints are manufactured to Australian/New Zealand Standards AS/NZS1754-2013 which require us to advise users of child restraints to "Destroy the entire restraint if it has been in use in a severe crash, even if no damage is obvious". The joint Australian/New Zealand Standards committee CS/85, advise that this statement applies whether a child was in the child restraint or not. A severe crash, we consider as being one where the main body structure of the vehicle is distorted.
- There is no method of determining if the restraint has been damaged and we concur with the Australian/New Zealand Standards in recommending destruction of the child restraint.
- This notice is to advise you of the requirements of the Australian/New Zealand Standards and our obligation in complying with the standards.
- Please assist the owner of this restraint in their claim.

- **Britax Childcare Pty. Ltd.**  
■ (Incorporated in Victoria)  
■ A.B.N 55 006 773 600  
■ Head office and registered address:  
■ Level 4, 650 Lorimer Street, Port Melbourne, 3207 VIC  
■ P.O. Box 5119 Garden City VIC 3207  
■ Telephone: 1300 303 330

- New Zealand Office:  
■ Britax Childcare NZ Limited.  
■ PO Box 100-247 Auckland 9  
■ Telephone: 0508 688 822



### CRASH EXCHANGE

We would never want you to experience an accident, but unfortunately accidents do happen.

If you experience an accident you may be eligible for a free replacement.

The Safe-n-Sound Crash Exchange Program is a voluntary program designed to ensure that our children are safe and that any seat that may have experienced a severe crash is taken out of the market.

There is no method of determining if the restraint has been damaged in a severe crash, so the restraint should be destroyed as the crash may reduce the child restraints ability to perform.

Since its inception in 2006, the Crash Exchange program has helped 100's of families ensure that their children have new restraints and that the restraints are not sold second hand placing others at risk.

Our Crash Exchange Terms and Application form are accessible on our website. Please visit [www.britax.com.au](http://www.britax.com.au) for further information.



### **AUSTRALIA**

Britax Childcare Pty. Ltd.  
A.B.N 55 006 773 600

### **Head office and registered address:**

Level 4, 650 Lorimer Street, Port Melbourne, VIC, 3207  
P.O. Box 5119 Garden City, VIC, 3207

**Customer Service** 1300 303 330

**Email** [au-custserv@britax.com](mailto:au-custserv@britax.com)

**[www.britax.com.au](http://www.britax.com.au)**

### **NEW ZEALAND**

Britax Childcare (NZ) Ltd.

**Customer Service** 0508 688 822

**Email** [nz-custserv@britax.com](mailto:nz-custserv@britax.com)

**[www.britax.com.nz](http://www.britax.com.nz)**

### **INTERNATIONAL ENQUIRIES**

Contact your local Distributor



Scan QR code for  
installation and  
how to use.

britax  
safe·n·sound

## WARRANTY

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonable foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be acceptable quality and the failure does not amount to a major failure. For the full terms of the Warranty refer to the Britax website [www.britax.com.au/service-support/warranty](http://www.britax.com.au/service-support/warranty)

The Safe-n-Sound, ISOFLEX trademark is the property of Britax Childcare Pty. Ltd. (Australia).  
The BRITAX and CLICK & GO trademark are the property of Britax Childcare Holdings Ltd, UK.  
We reserve the right to alter this product without notice.  
© 2002-2019 Britax Childcare Pty. Ltd. Patent Pending.

Part No.2202581/H

50